



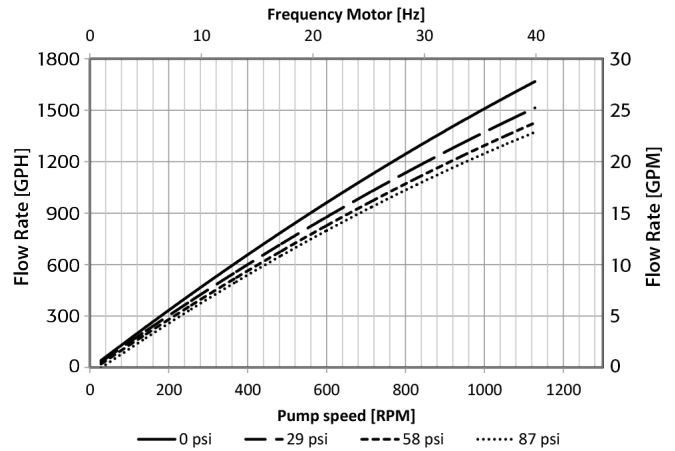

## Performance Charts

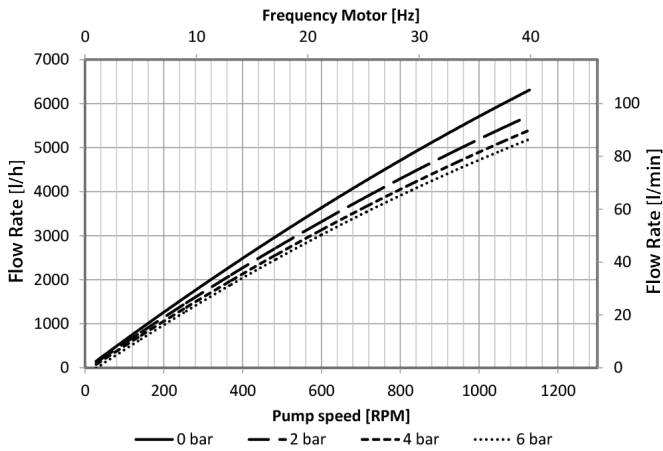

Depending on the selected motor/frequency drive combination, the motor frequency and the resulting pump speed might differ.

## Accessories

### Control Box



- Variable speed controller with integrated touch pad for manual speed control
- Configurable for remote speed control with 4-20 mA analogue input
- 400 V, 3P
- Hygienic 1.4301 housing, IP 54
- Easy plug & play installation



### Power Box

- Plug & Play installation
- Protects system and pump from overpressure
- Configurable pressure switch setpoint
- Reset button for pump reset
- To be used with pressure switch (also available)

### Diaphragm Sensor

- Sensor installed in ring drive unit
- Detection of all liquids
- Signal output to a controller, if diaphragm is ruptured

Distributed by:



QF4400S

© 2014 ALMATEC



ALMATEC Maschinenbau GmbH  
 Carl-Friedrich-Gauß-Str. 5  
 47475 Kamp-Lintfort, Germany  
 O: +49/2842/961-0, F: +49/2842/961-40  
[www.quattroflow.com](http://www.quattroflow.com)  
 info@almatec.de