



Provided by:



Sanitary Centrifugal Pumps

60Hz Curve Book



Table of Contents:

60 Hz Curves:




W+ 10/8 Model.....	4
W+ 22/20 Model – Low Flow Impeller.....	5-6
W+ 22/20 Model.....	7-8
W+ 25/210 Model.....	9
W+ 30/80 Model.....	10-11
W+ 30/120 Model.....	12-13
W+ 35/35 Model – Low Flow Impeller.....	14-15
W+ 35/35 Model.....	16-17
W+ 35/55 Model.....	18-19
W+ 50/8 Model.....	20-21
W+ 55/35 Model.....	22-23
W+ 55/60 Model.....	24-25
W+ 60/110 Model.....	26-27
W+ 65/350 Model.....	28-29
W+ 70/40 Model.....	30-31
W+ 80/80 Model.....	32-33
W+ 110/130 Model.....	34-35
W+ 140/50 Model.....	36-37



W+ SERIES MODEL W+10/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 4.3"
Performance data refer to water at 68°F
Provisional

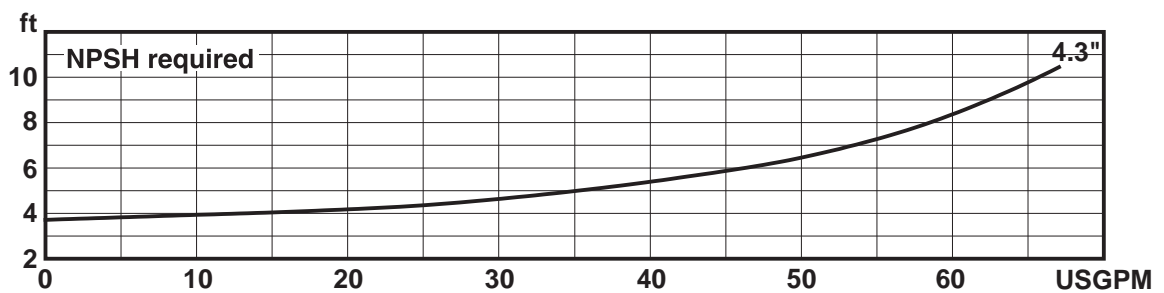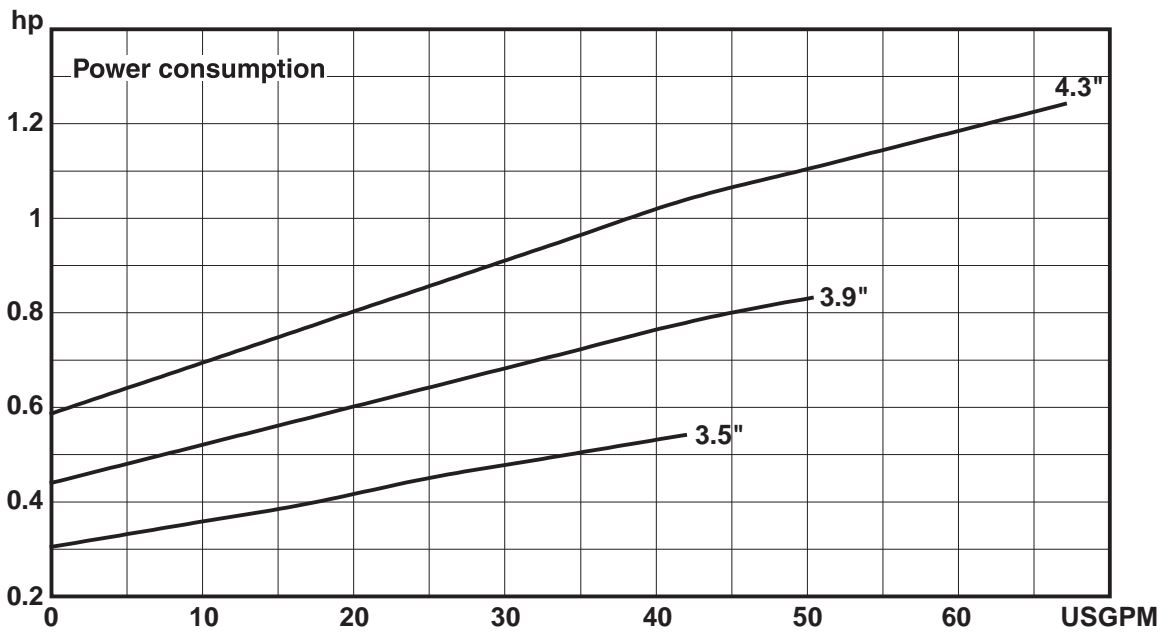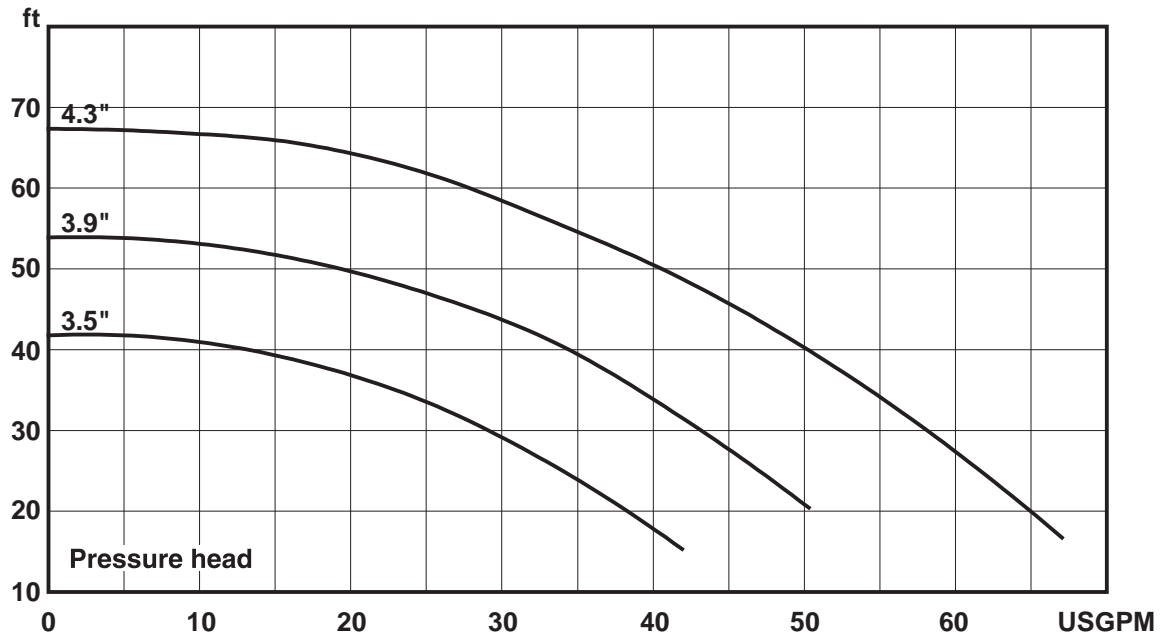

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE 2" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 5.6" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional

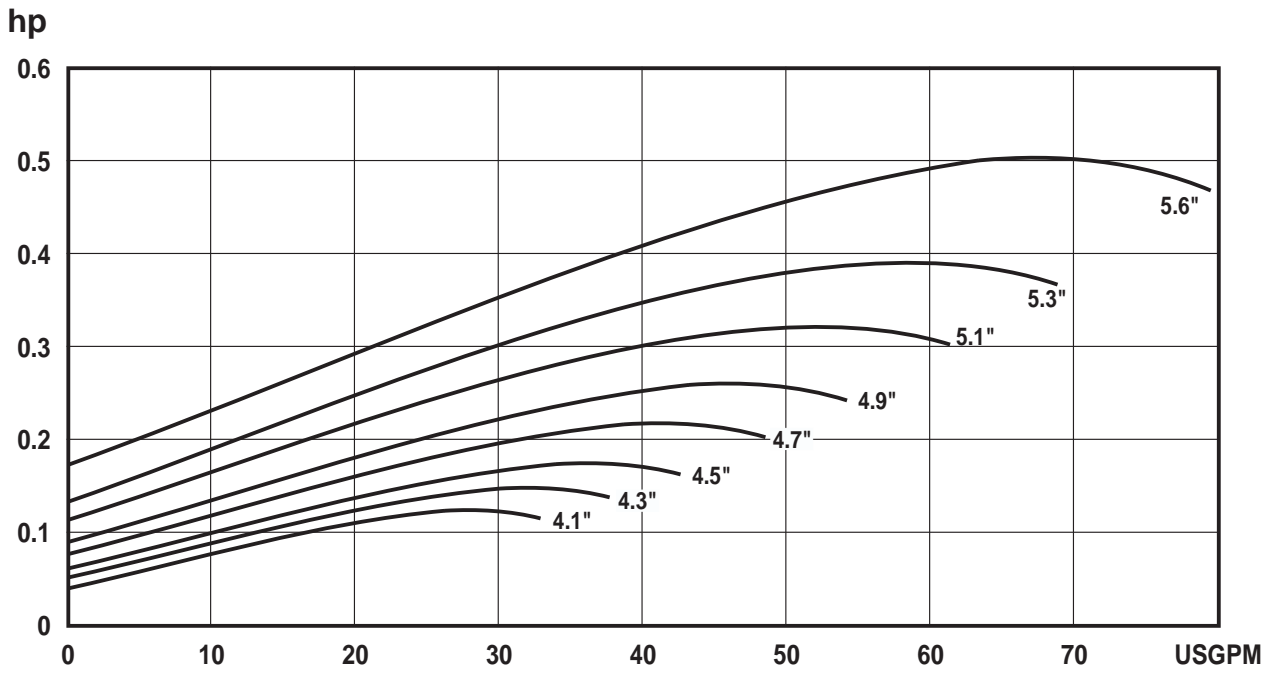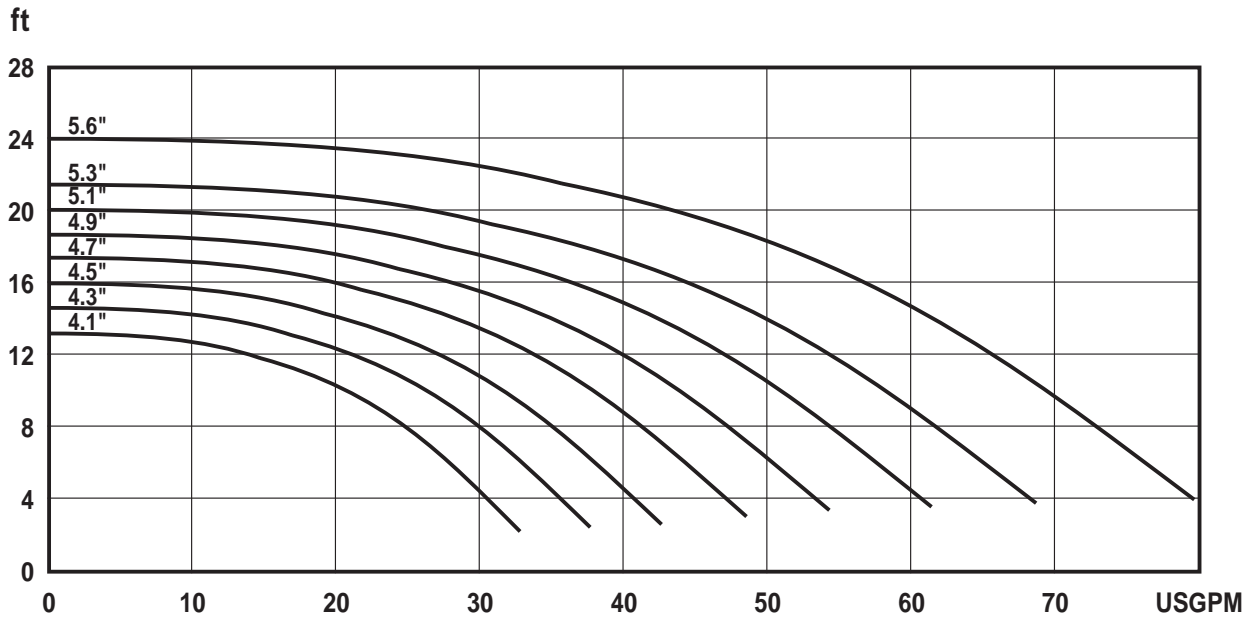

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE 2" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 5.6" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional


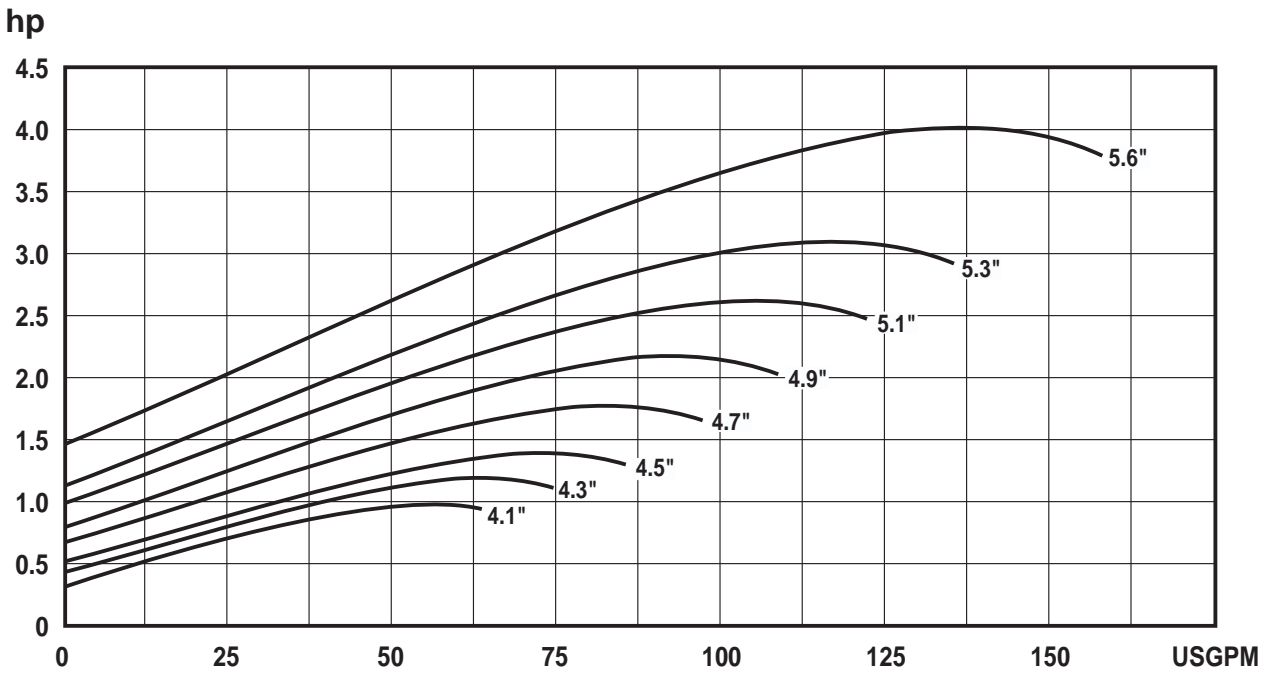
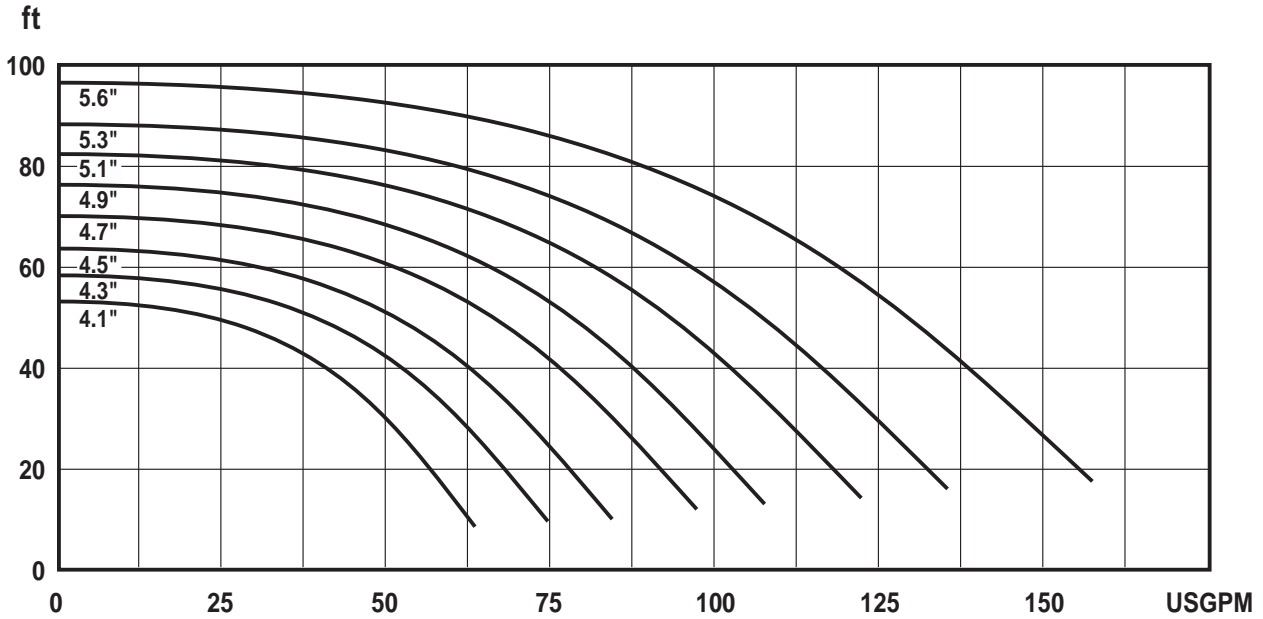




W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE
2" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____




Impeller dia: Max: 5.6"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

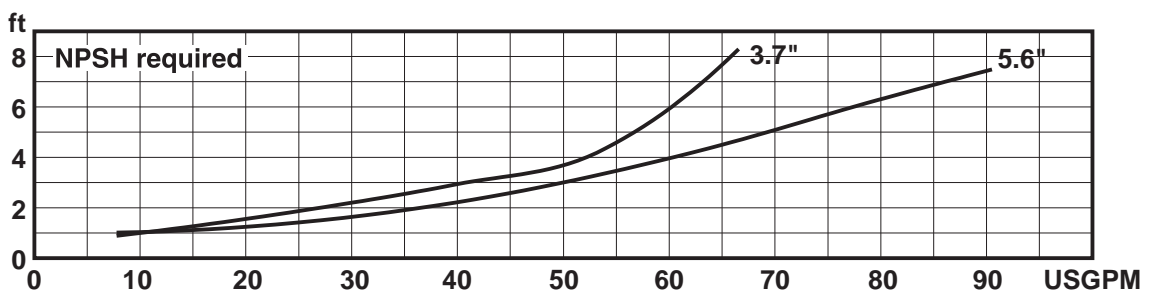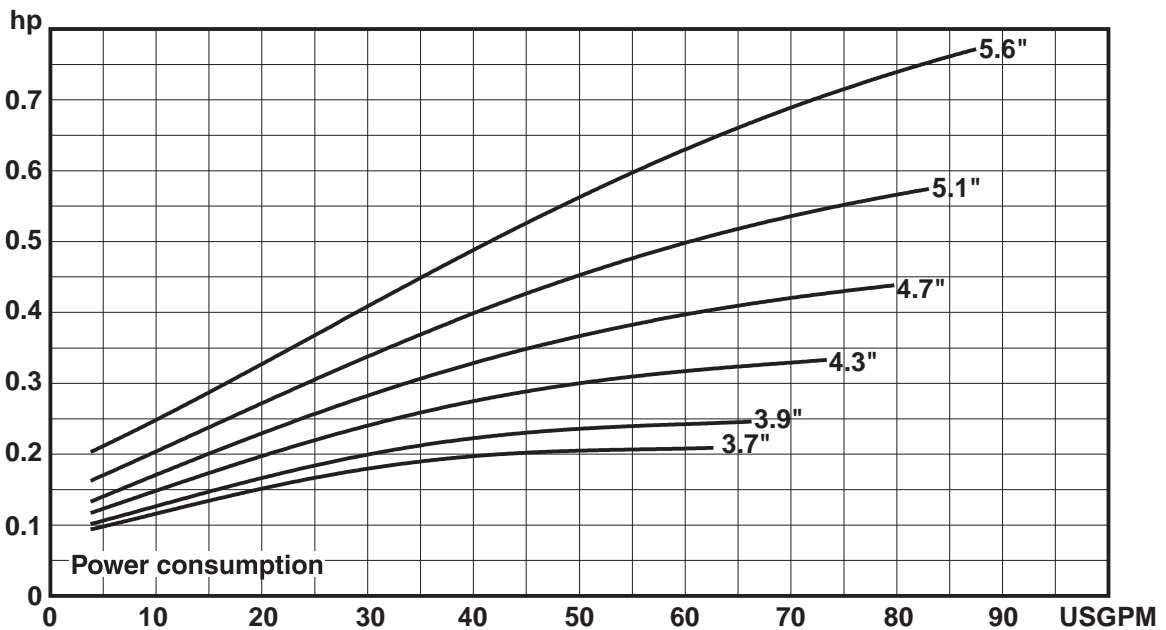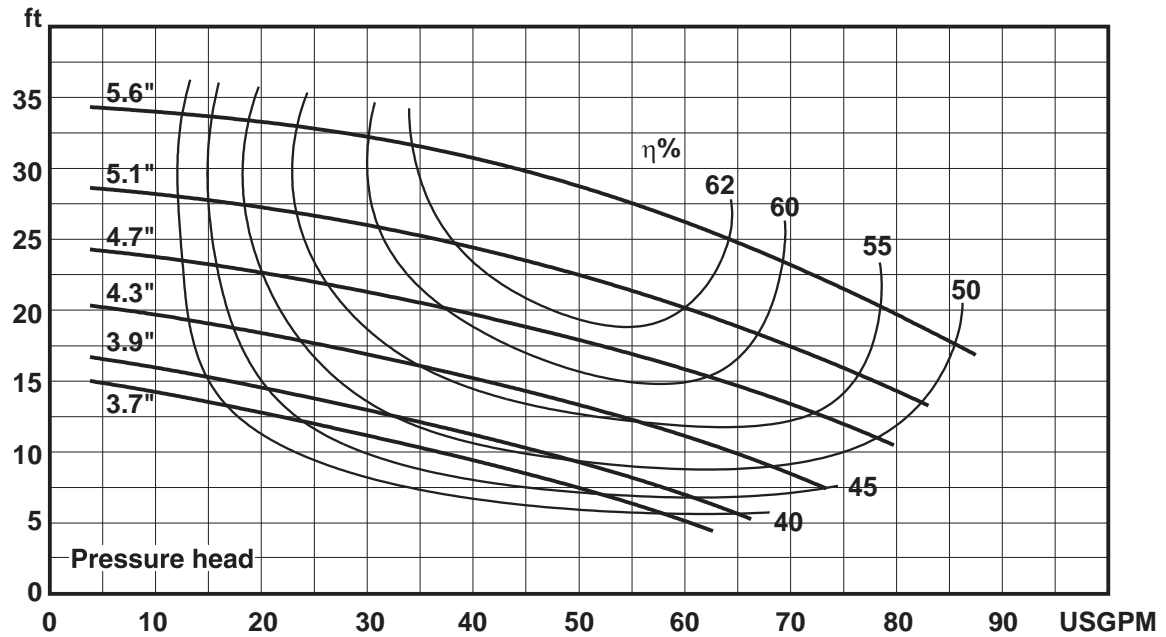

W+ SERIES MODEL W+22/20 CENTRIFUGAL PUMP CAPACITY CURVE 2" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 5.6"
Performance data refer to water at 68°F
Permissible tolerance \pm 5%

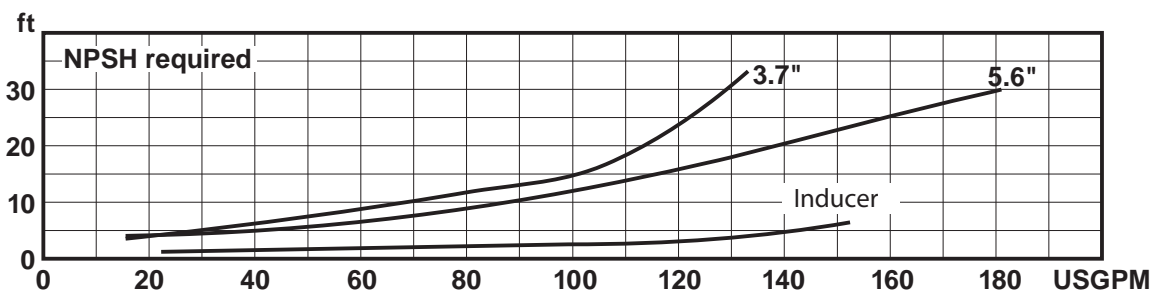
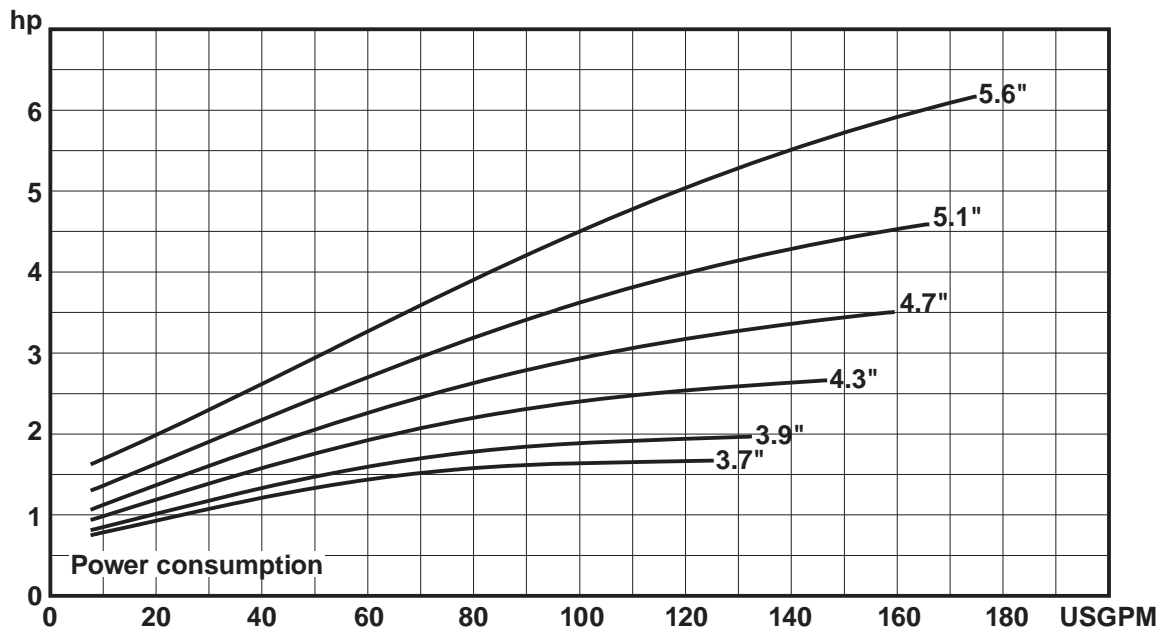
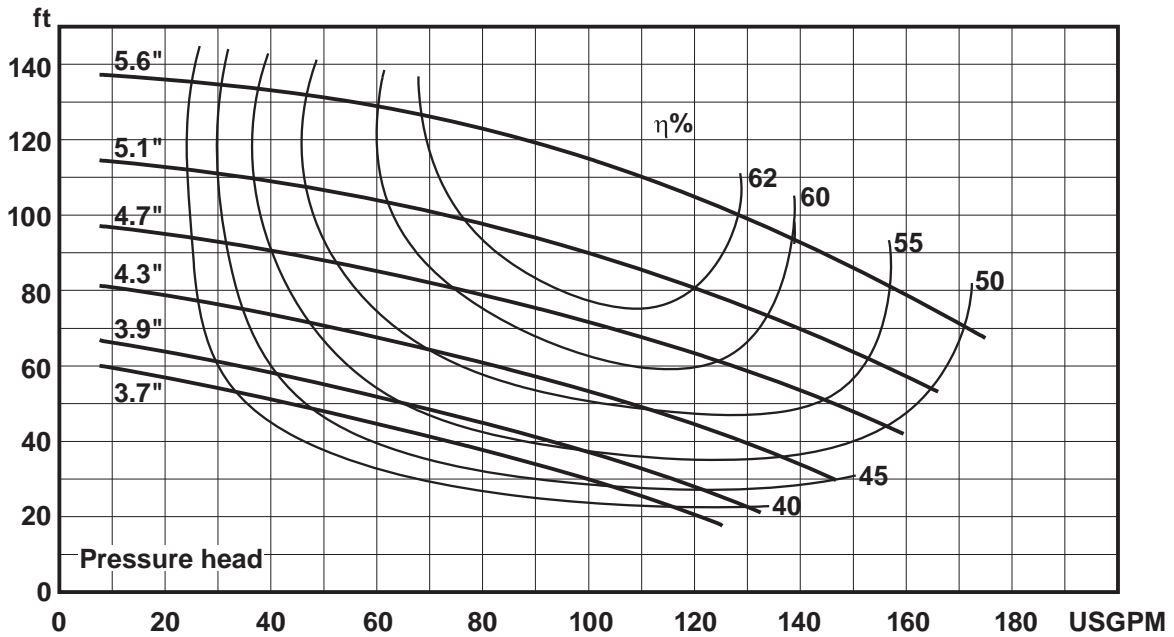




W+ SERIES MODEL W+25/210 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 11.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

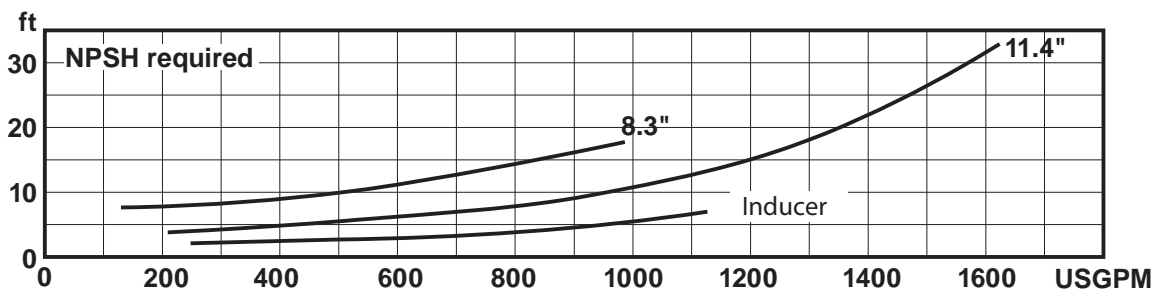
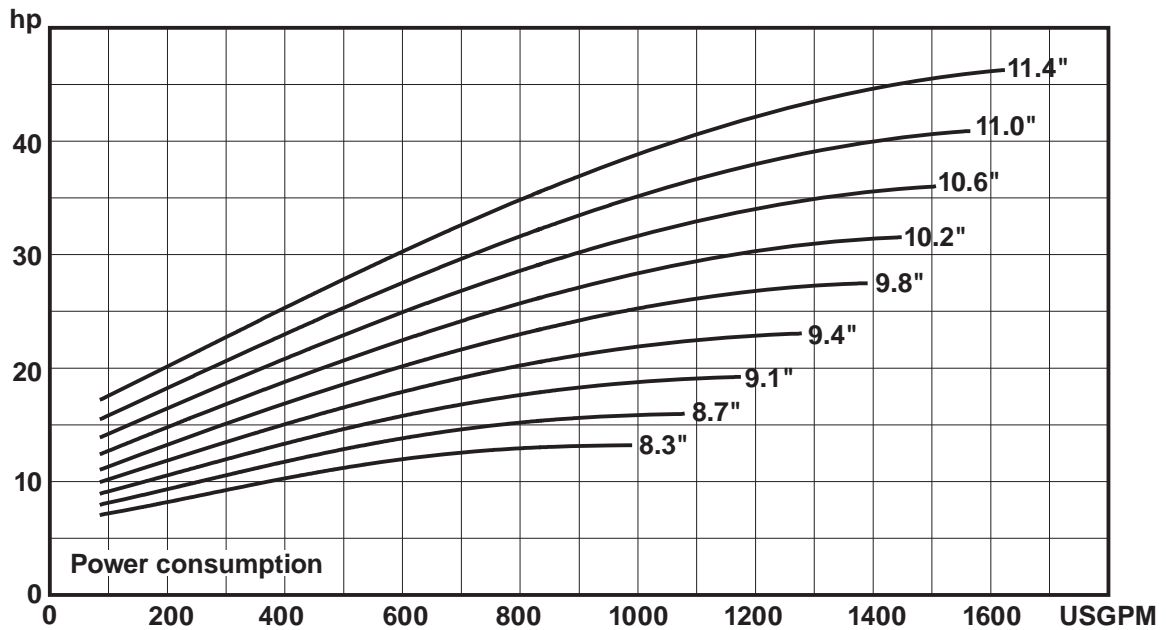
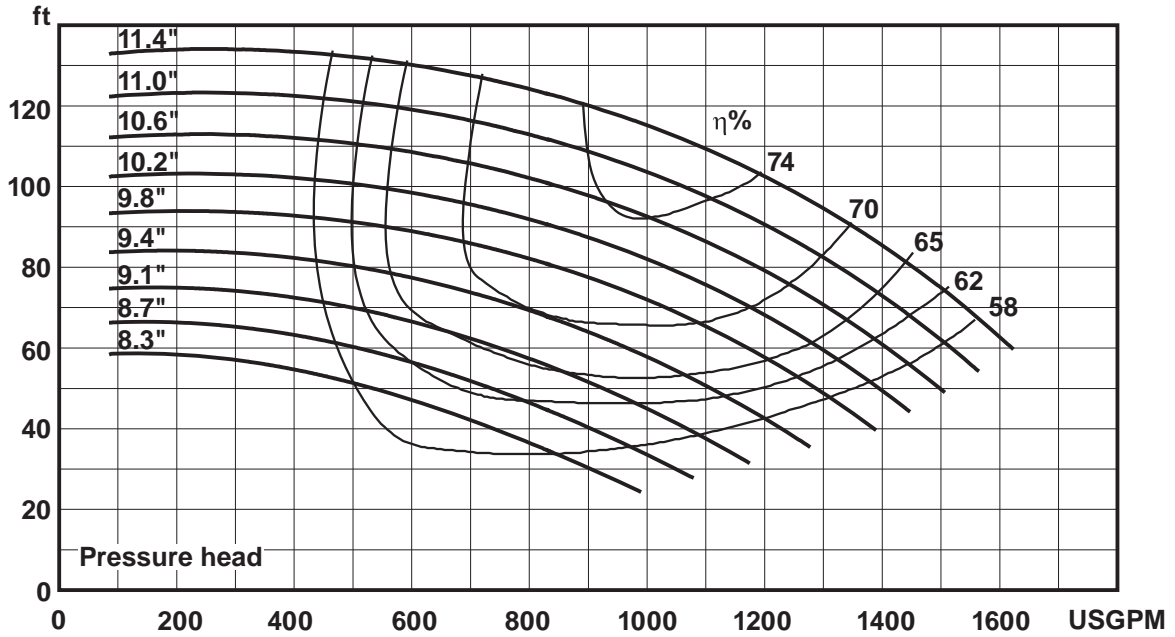




W+ SERIES MODEL W+30/80 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

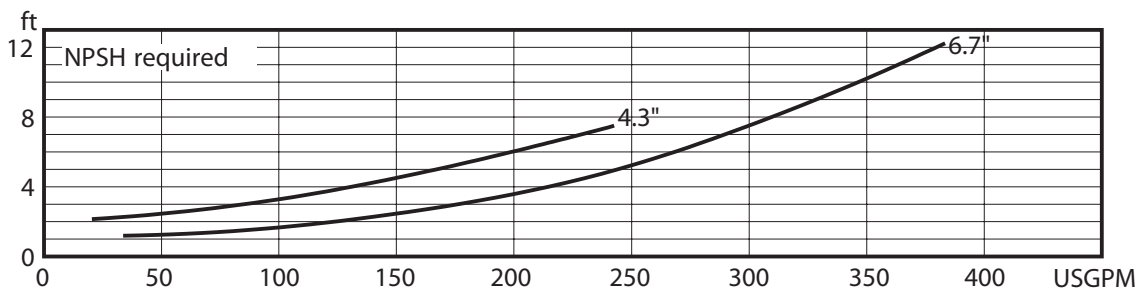
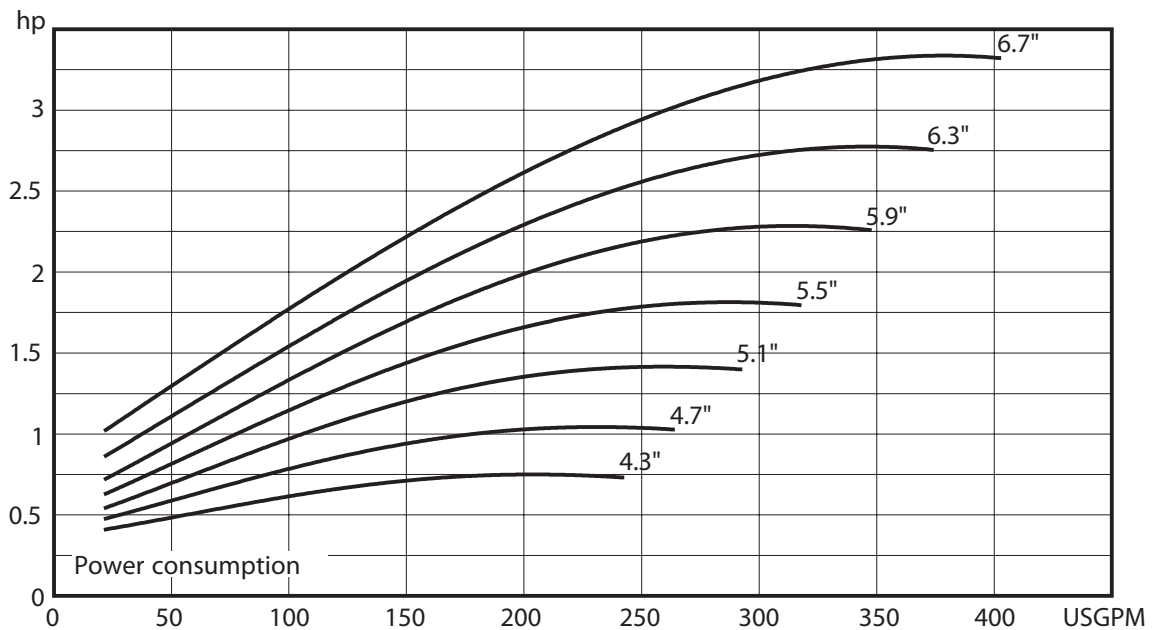
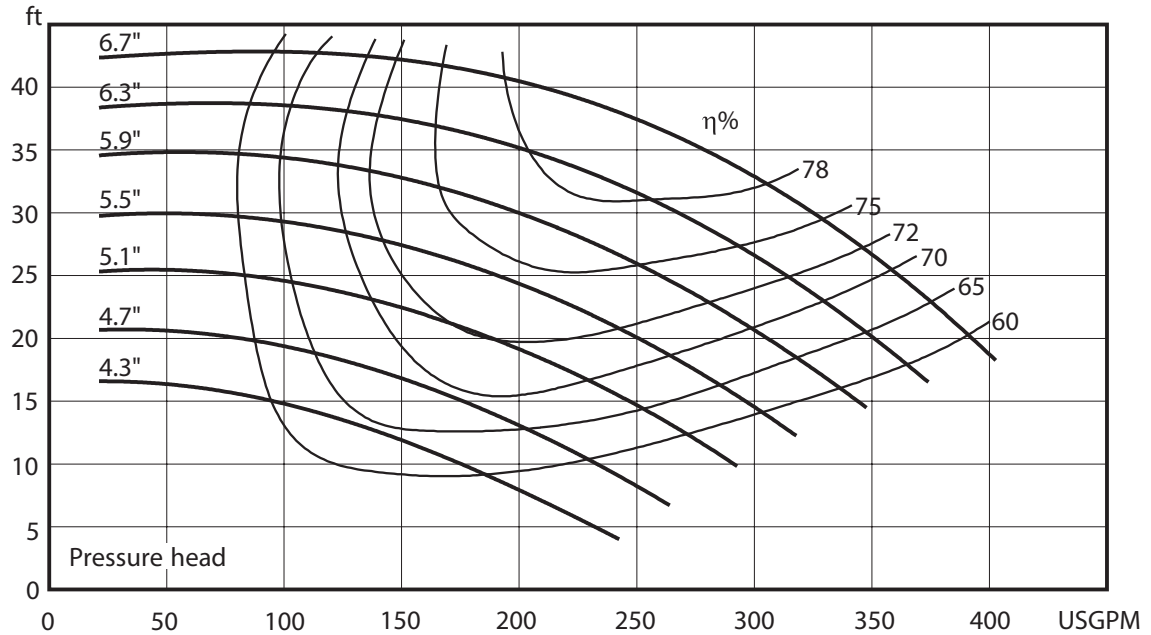




W+ SERIES MODEL W+30/80 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

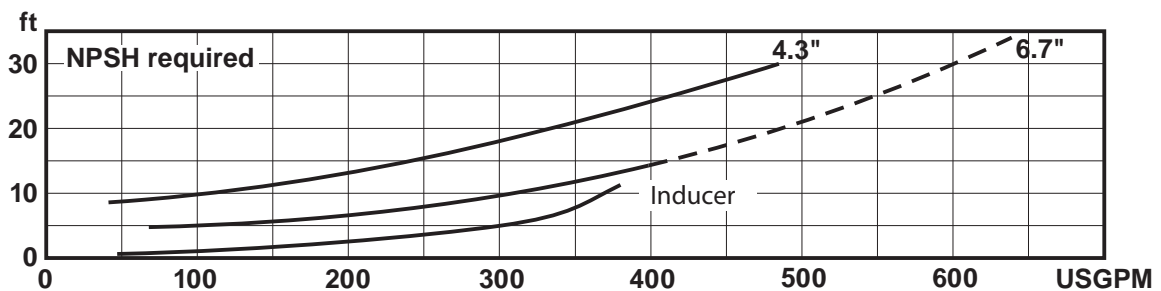
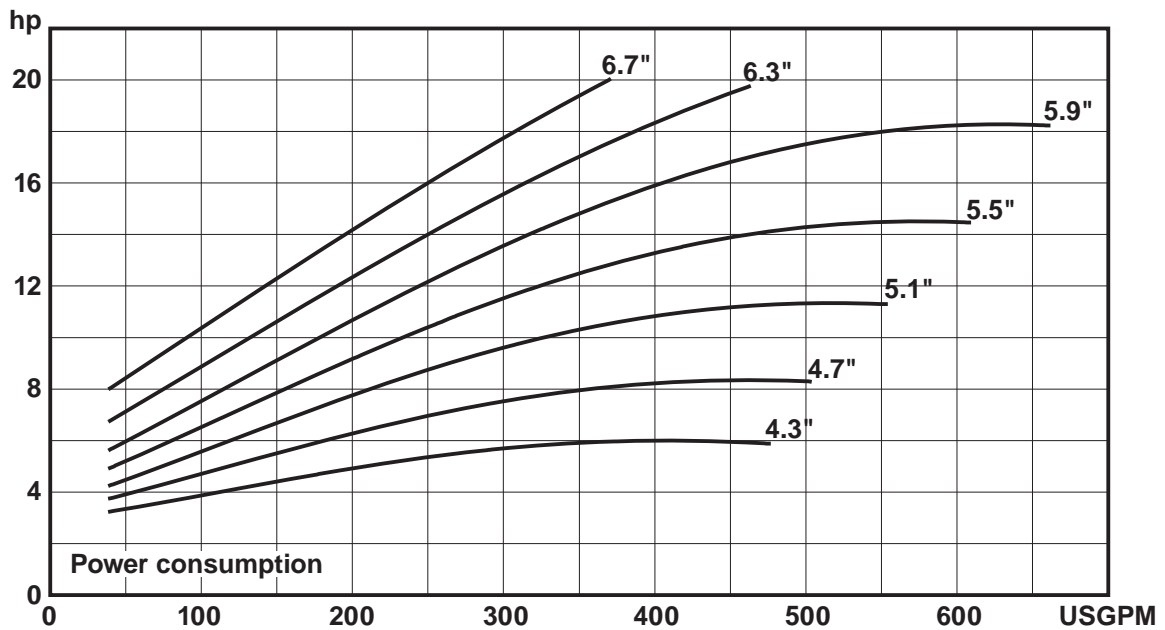
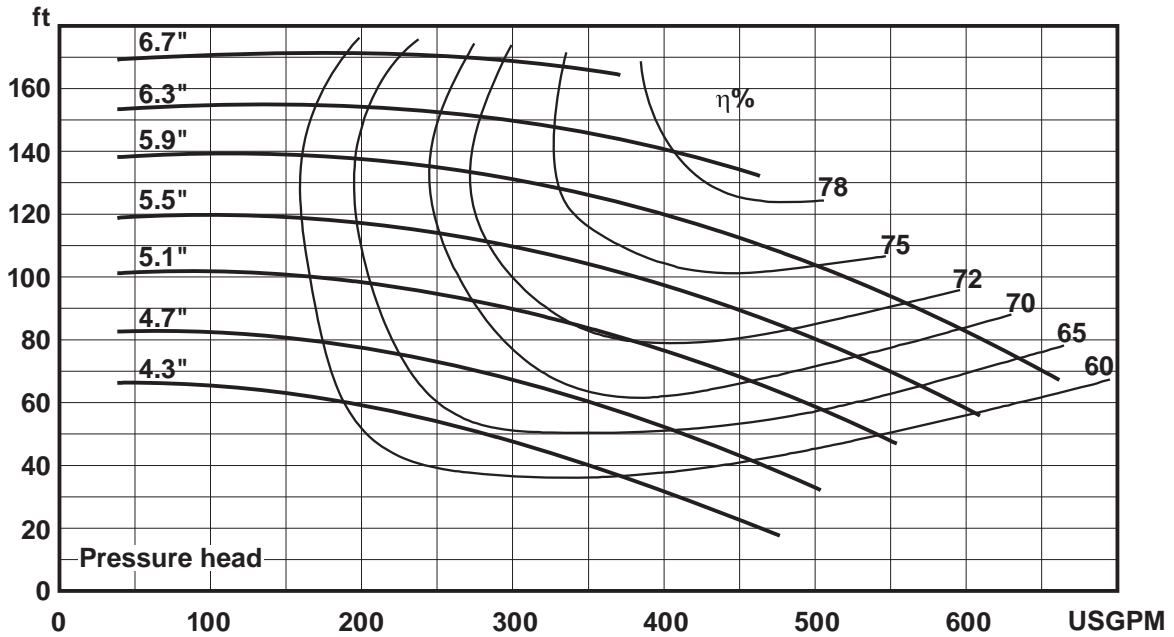




W+ SERIES MODEL W+30/120 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

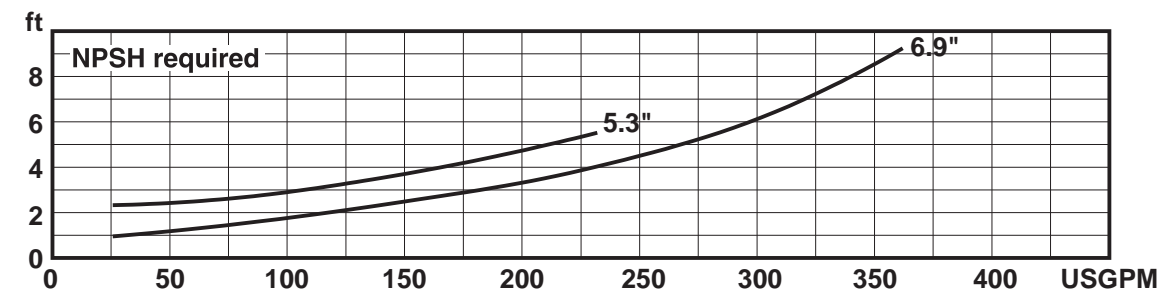
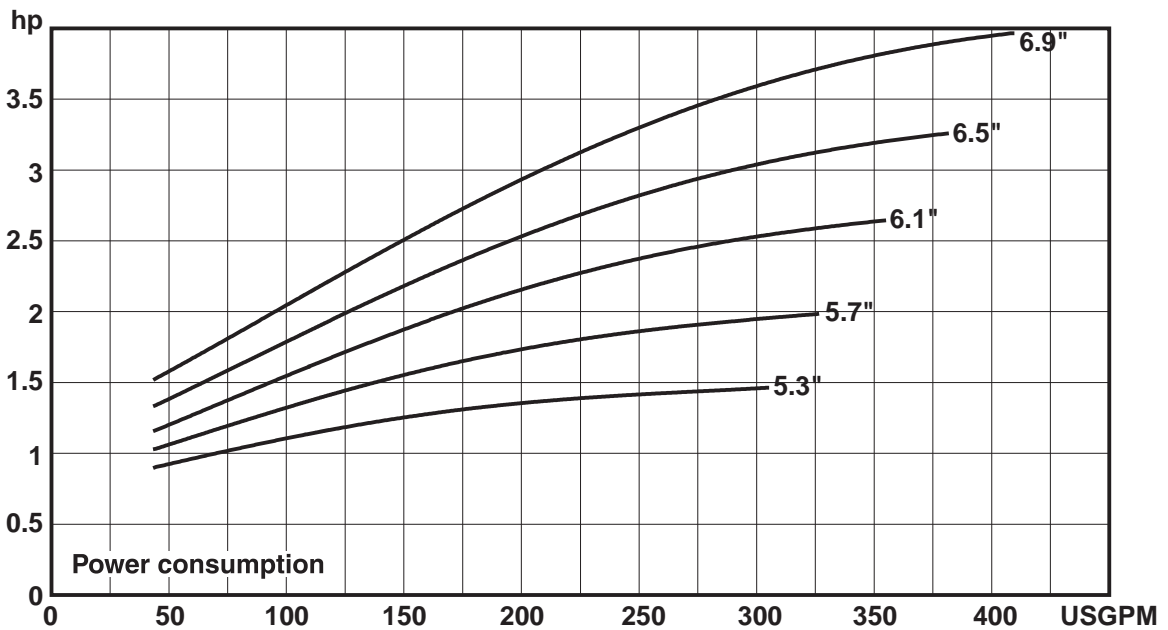
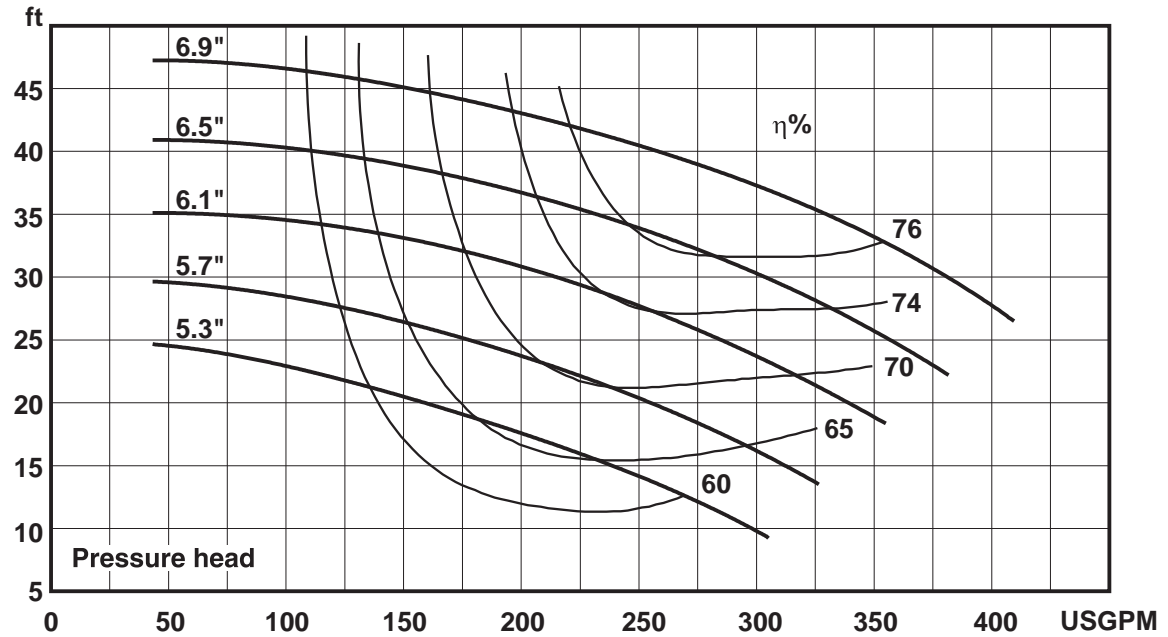




W+ SERIES MODEL W+30/120 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

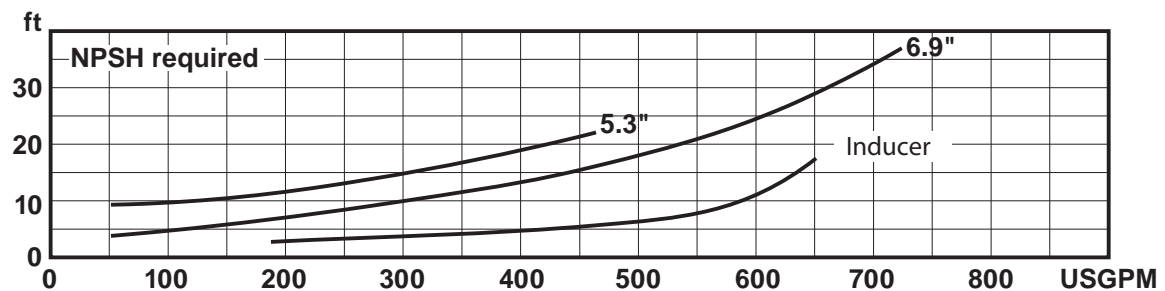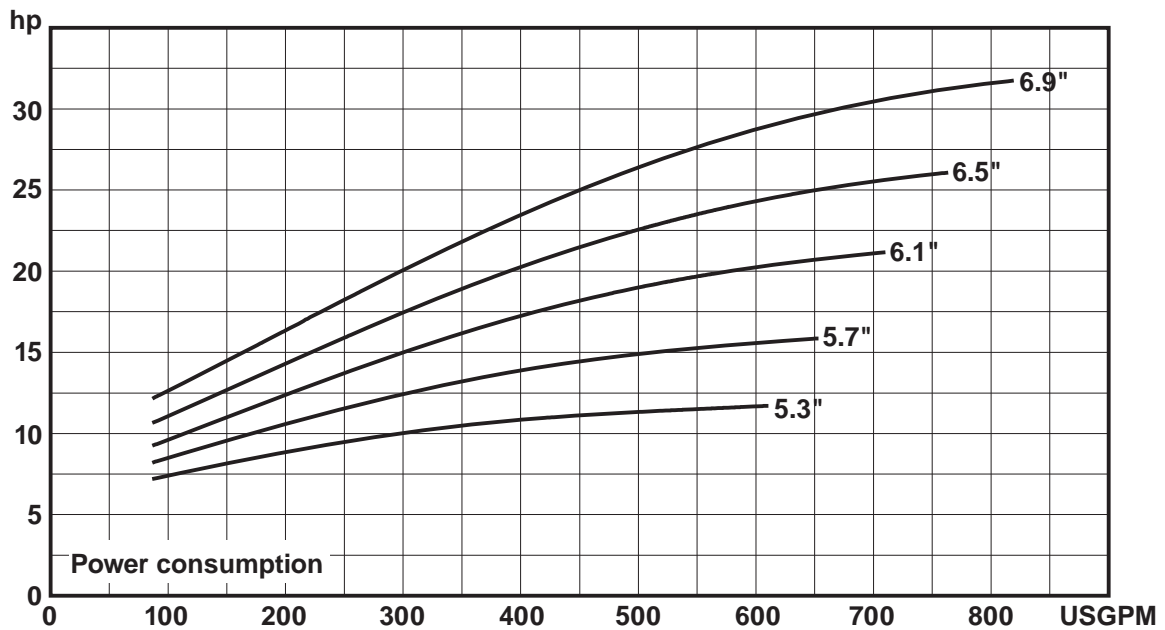
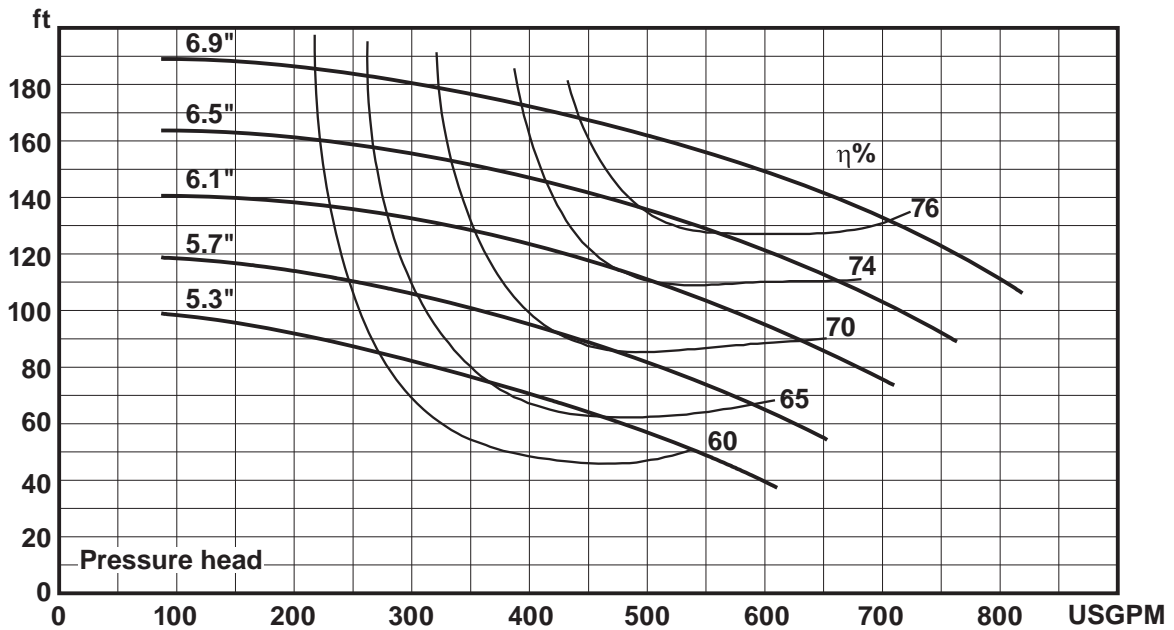




W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9" - Low Flow Impeller
 Performance data refer to water at 68°F
 Provisional

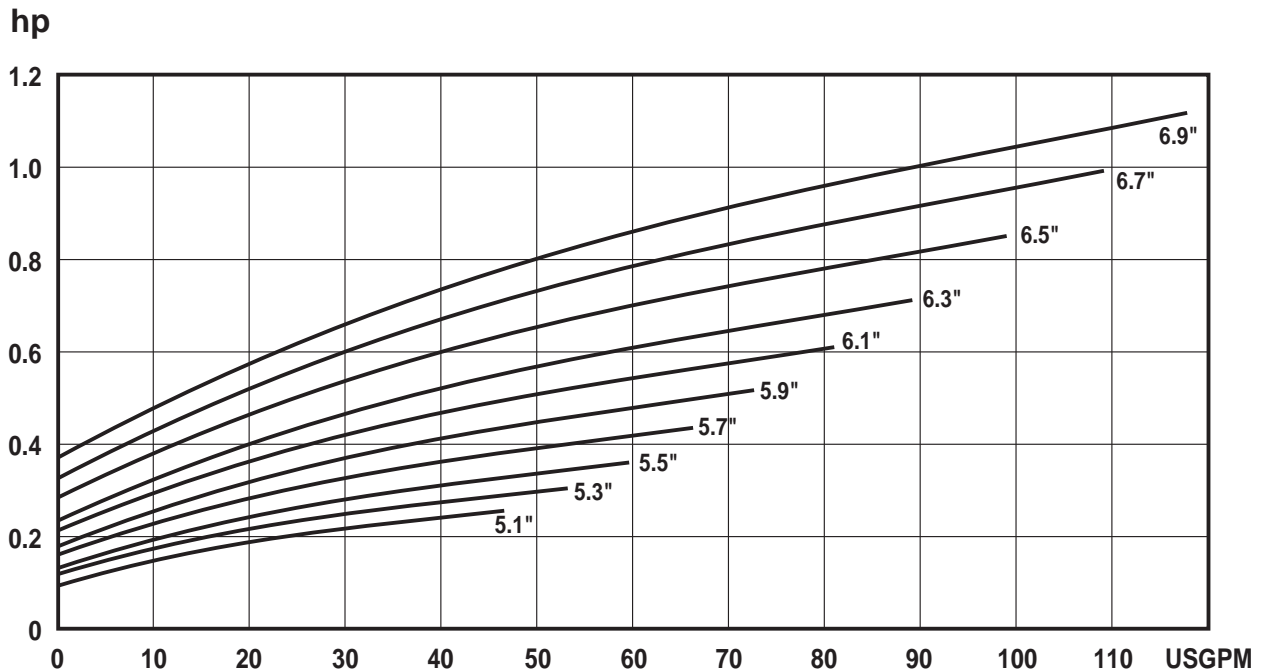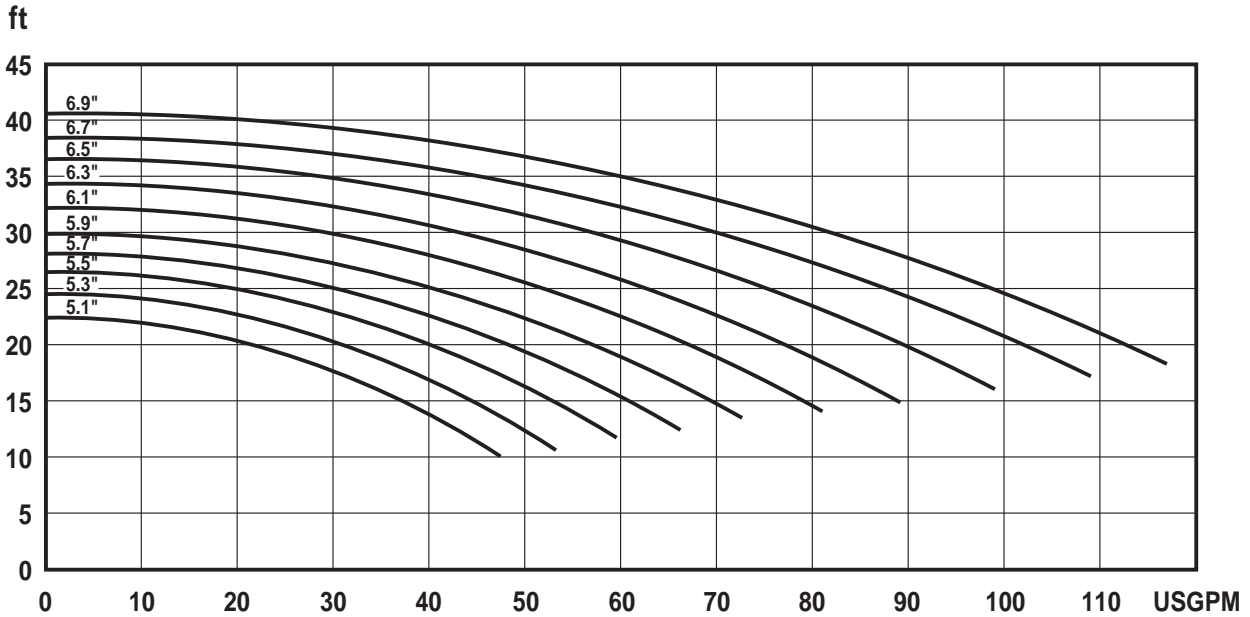

CANCELS
DATED
1-1-97





W+SERIES
453402 ISS U 10.08

EFFECTIVE 1-11-08

W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9" - Low Flow Impeller
Performance data refer to water at 68°F
Provisional


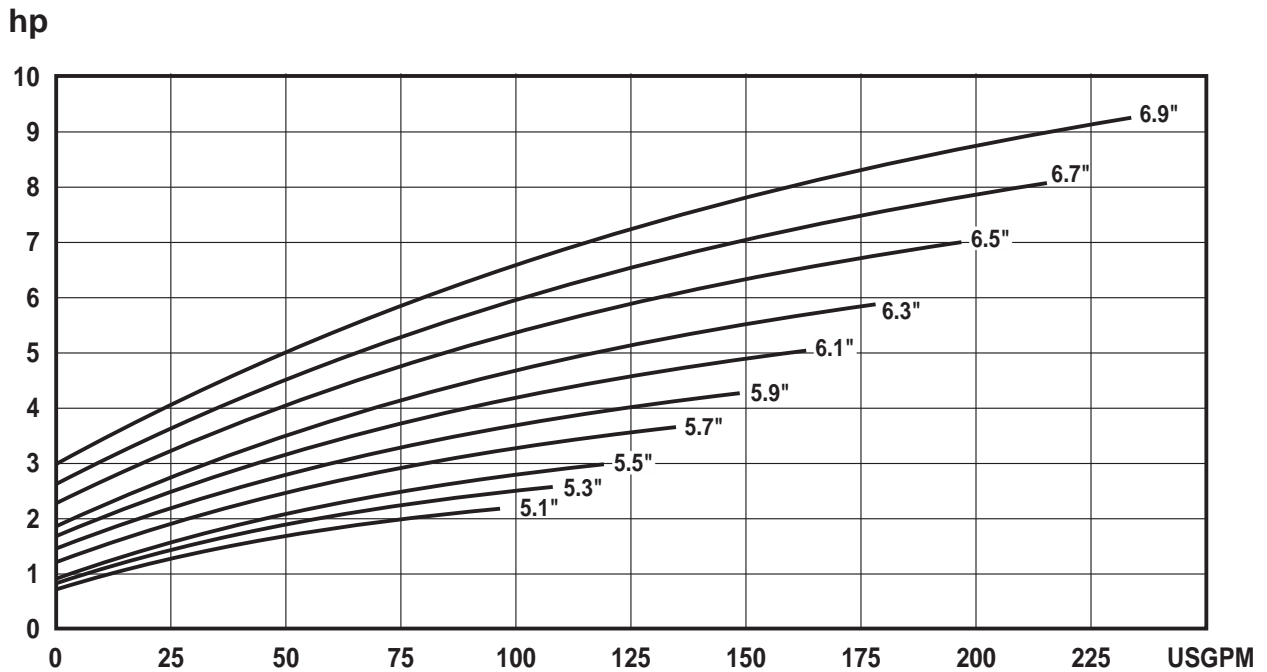
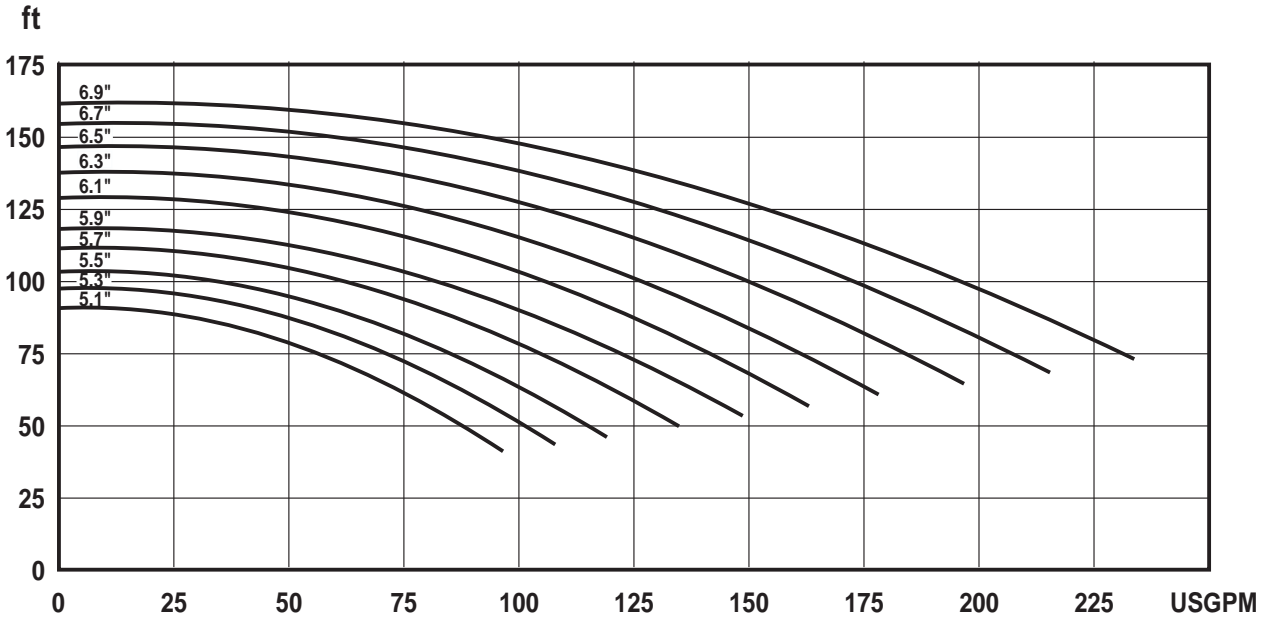




W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

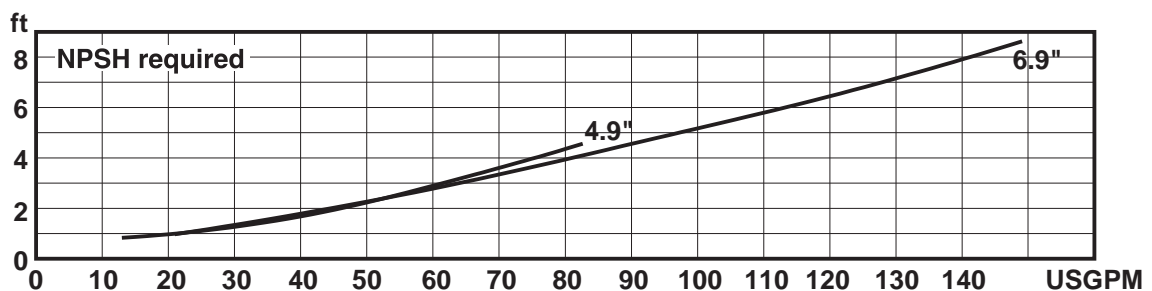
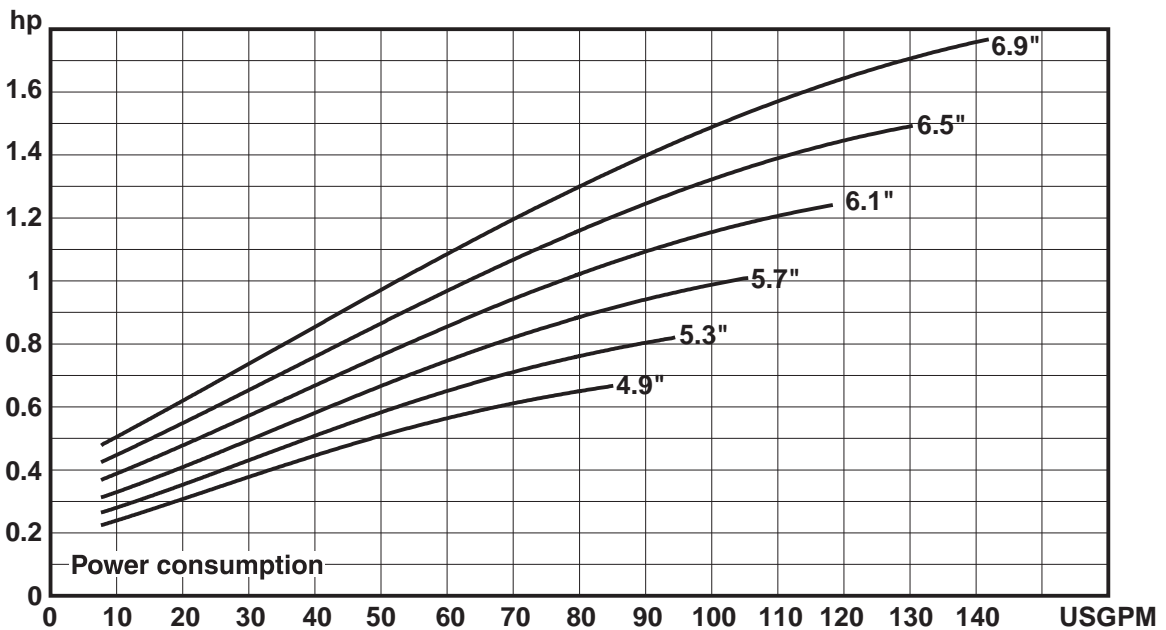
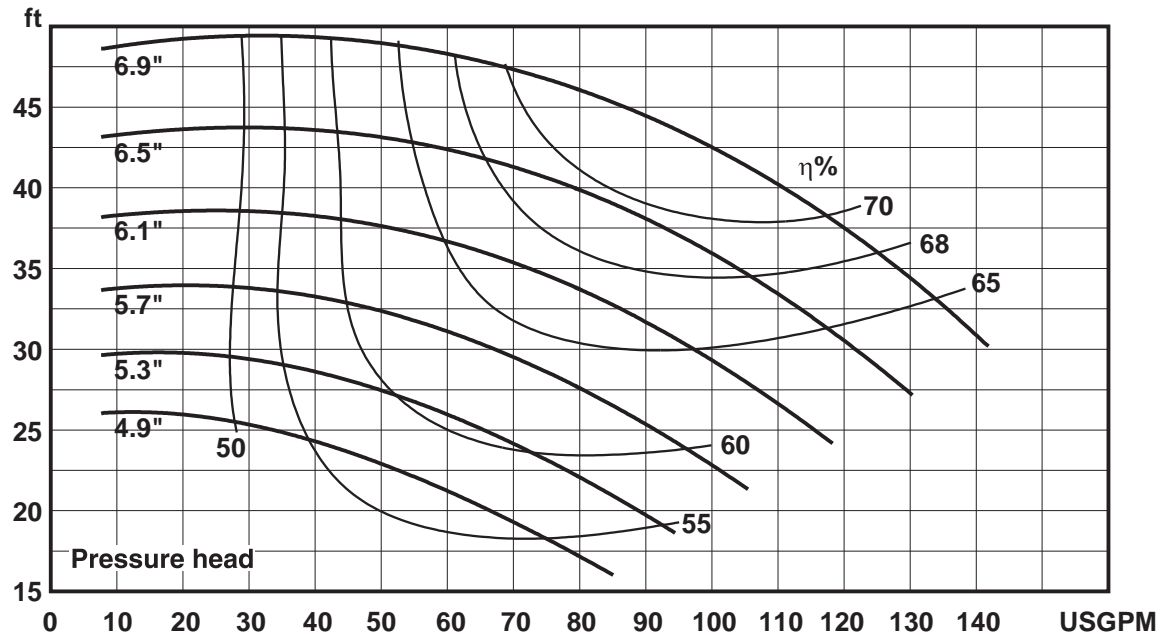




**W+ SERIES MODEL W+35/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 2" OUTLET, 3500 RPM, 60 Hz**

NOTE: _____

Impeller dia: Max: 6.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

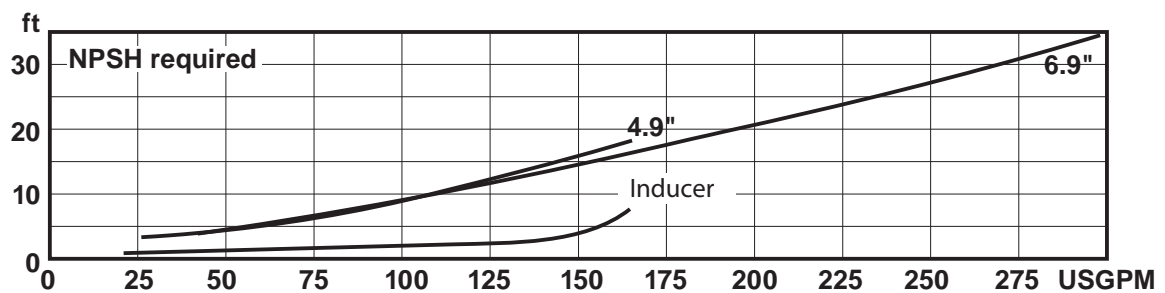
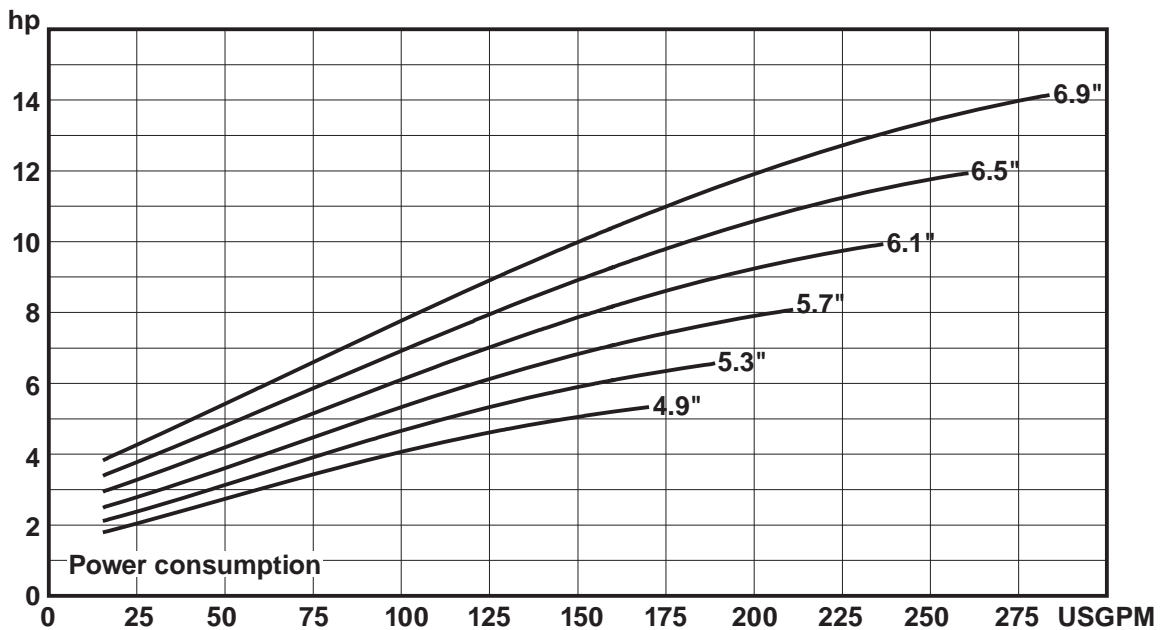
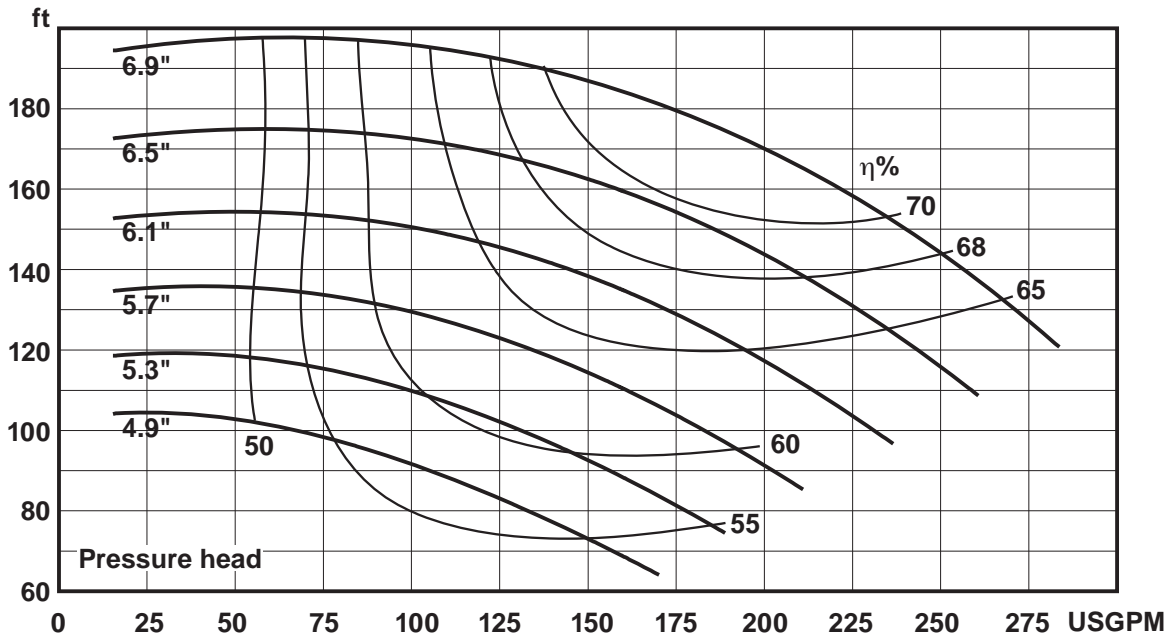




W+ SERIES MODEL W+35/55 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2.5" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

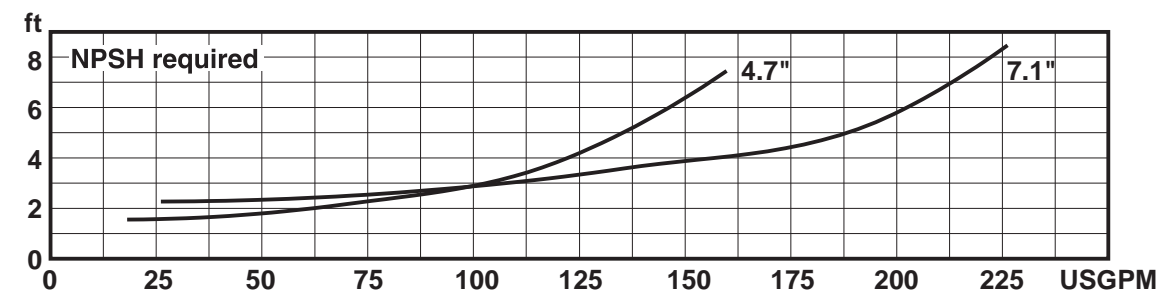
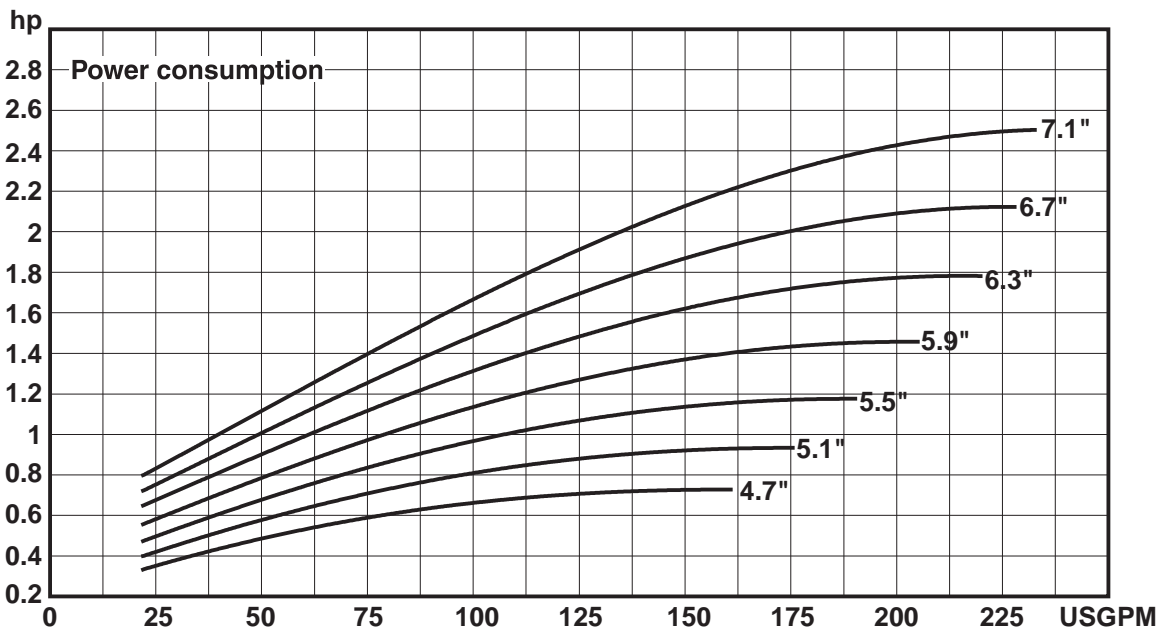
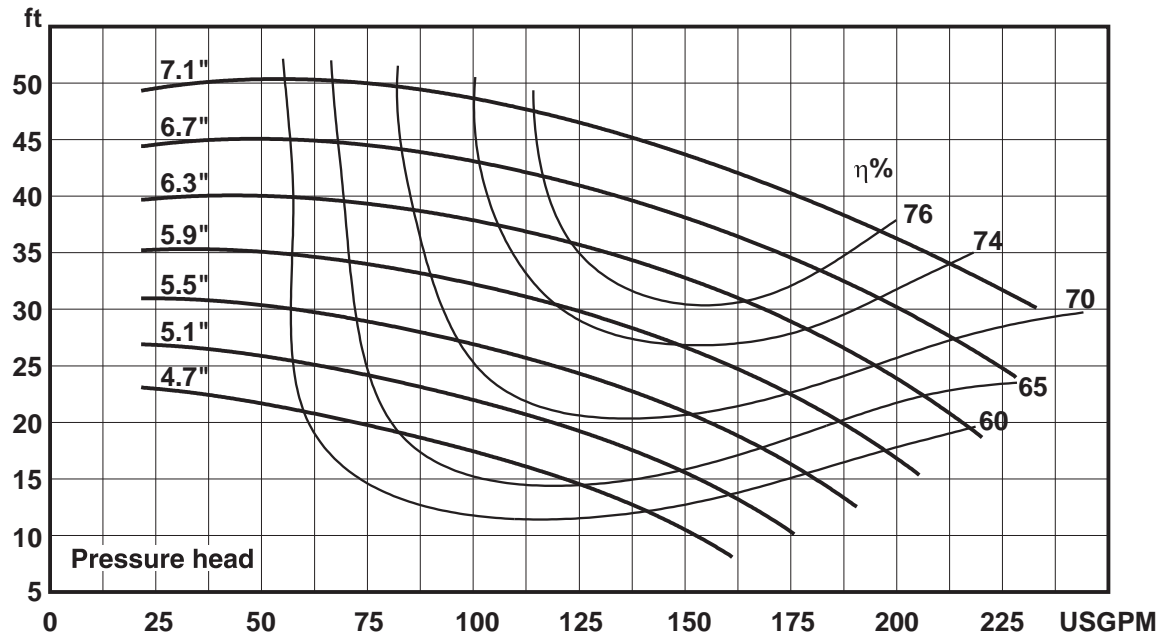




W+ SERIES MODEL W+35/55 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2.5" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

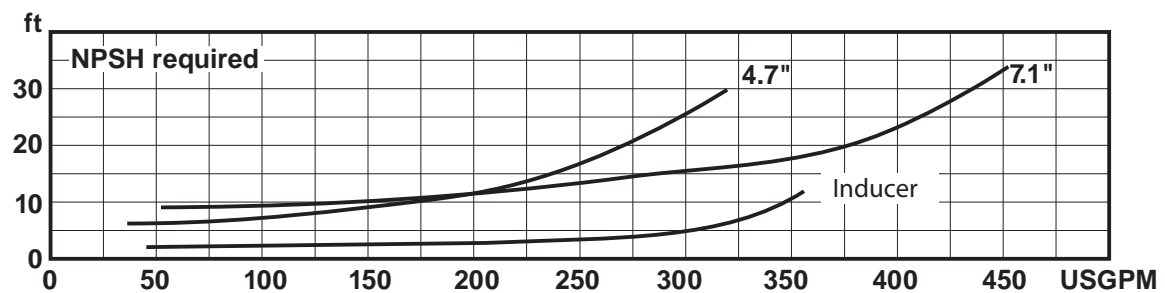
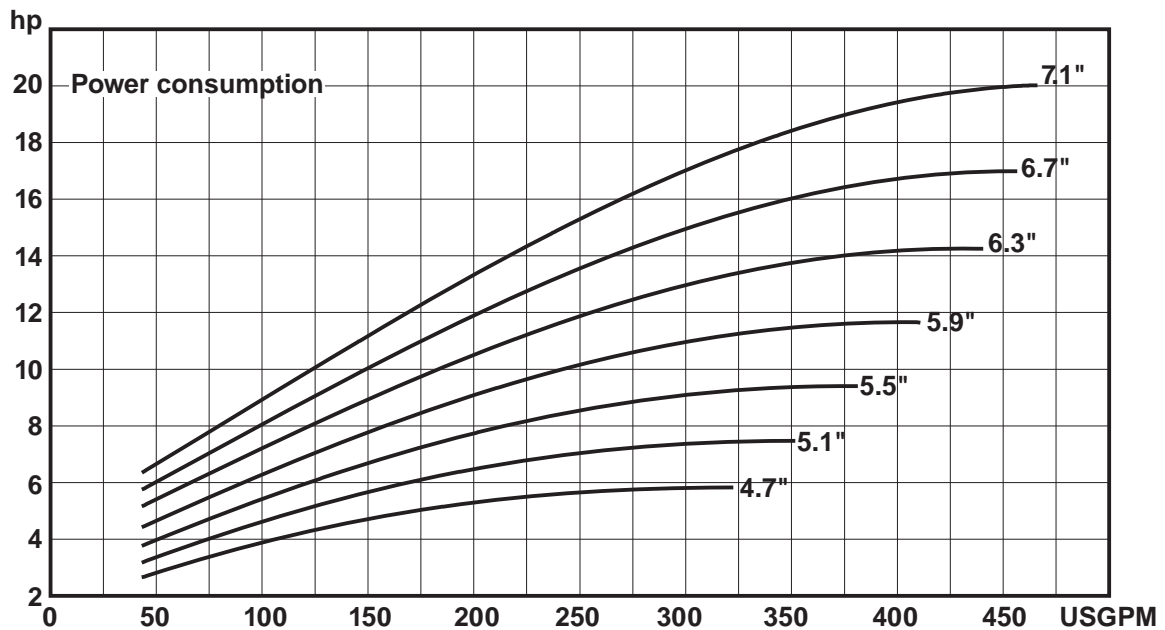
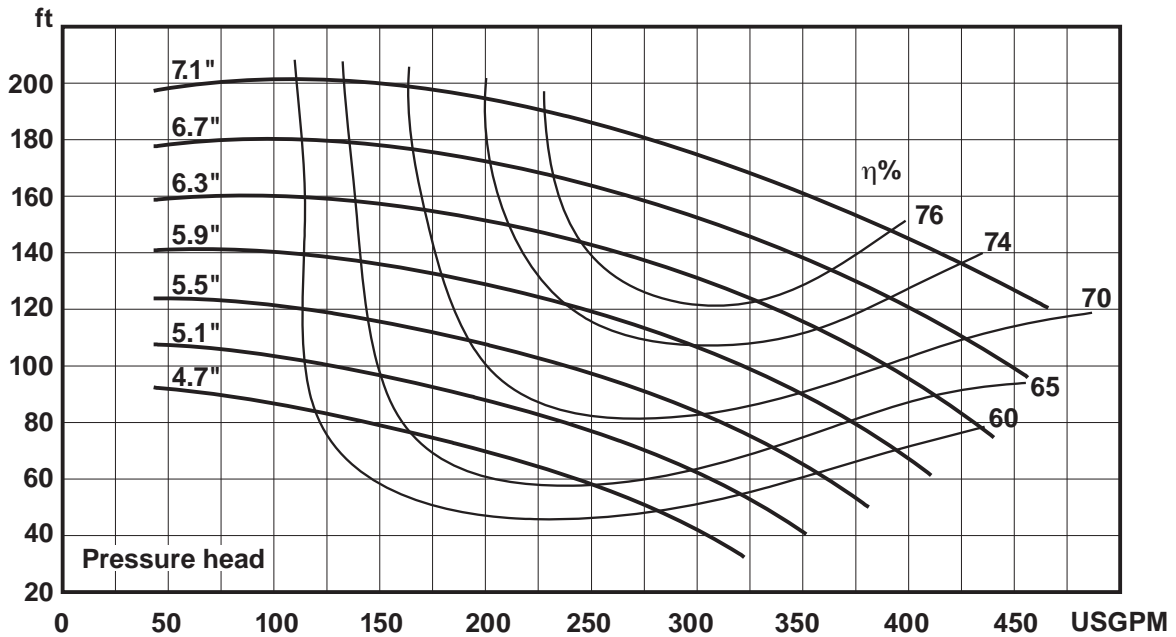




W+ SERIES MODEL W+50/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

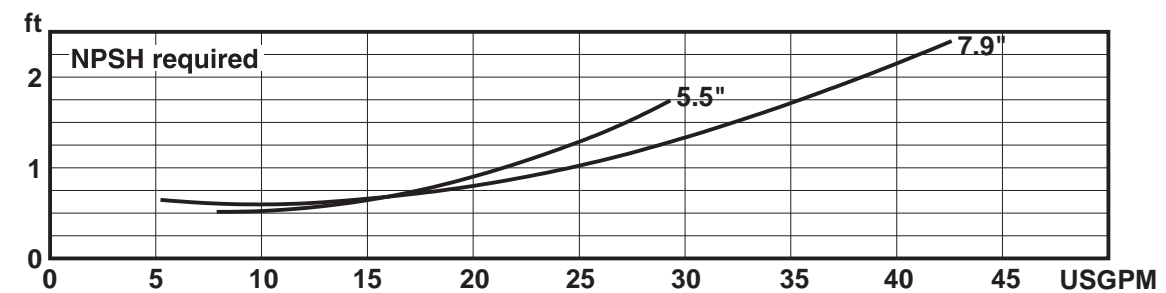
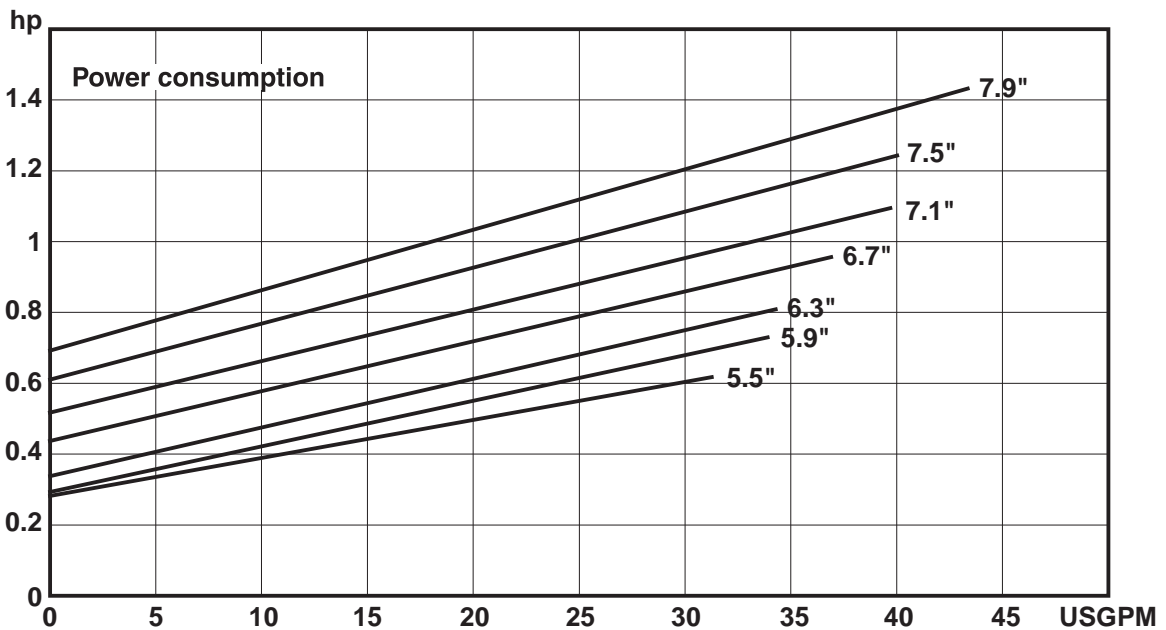
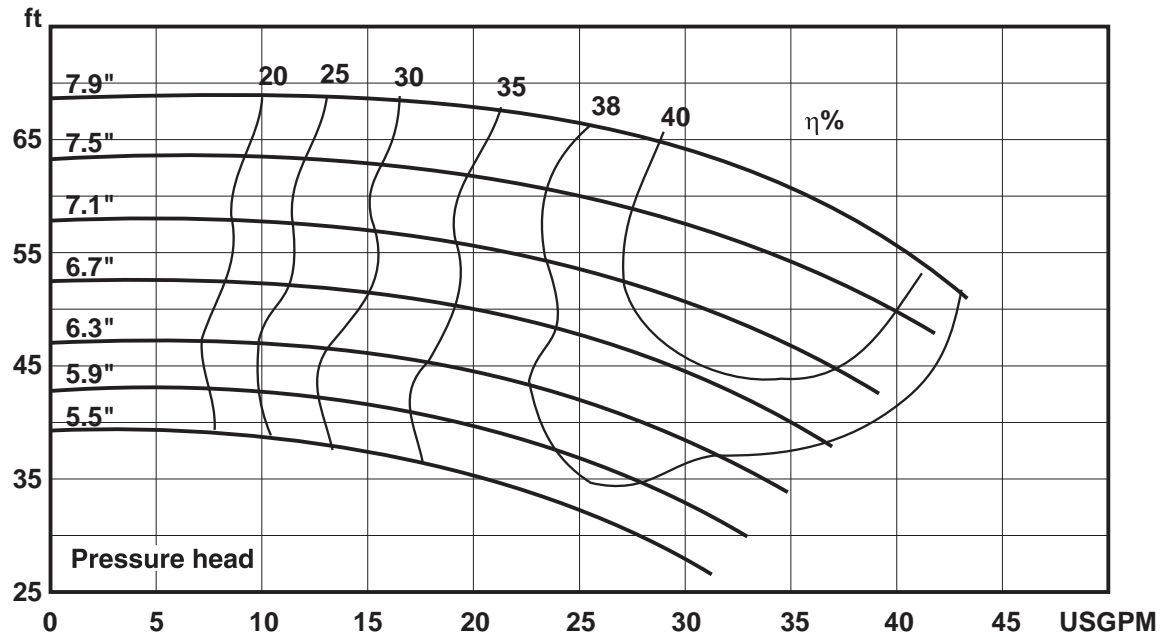




W+ SERIES MODEL W+50/8 CENTRIFUGAL PUMP CAPACITY CURVE
1.5" INLET - 1" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.9"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

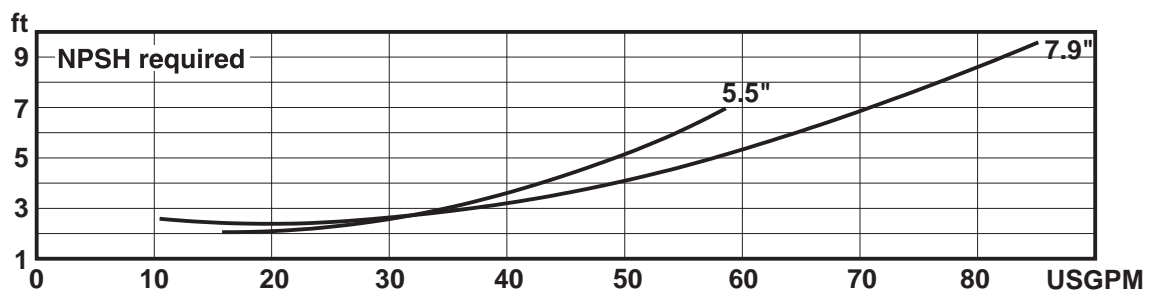
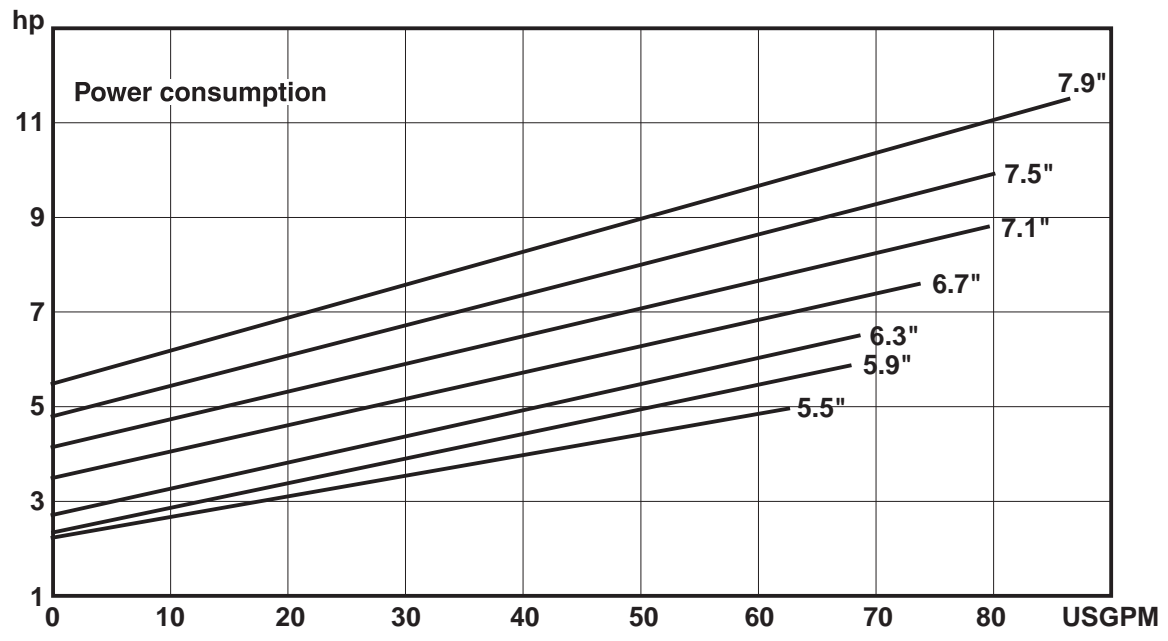
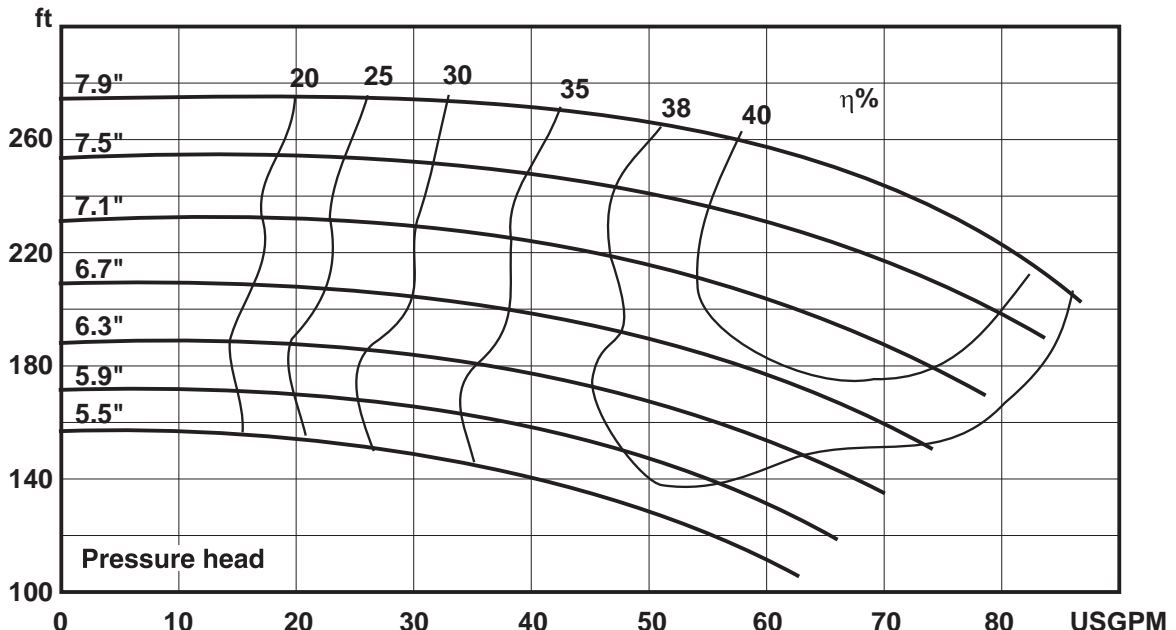




W+ SERIES MODEL W+55/35 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.3"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

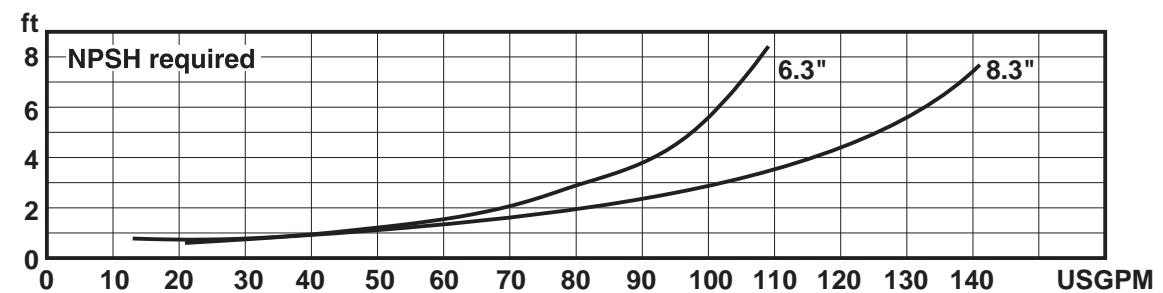
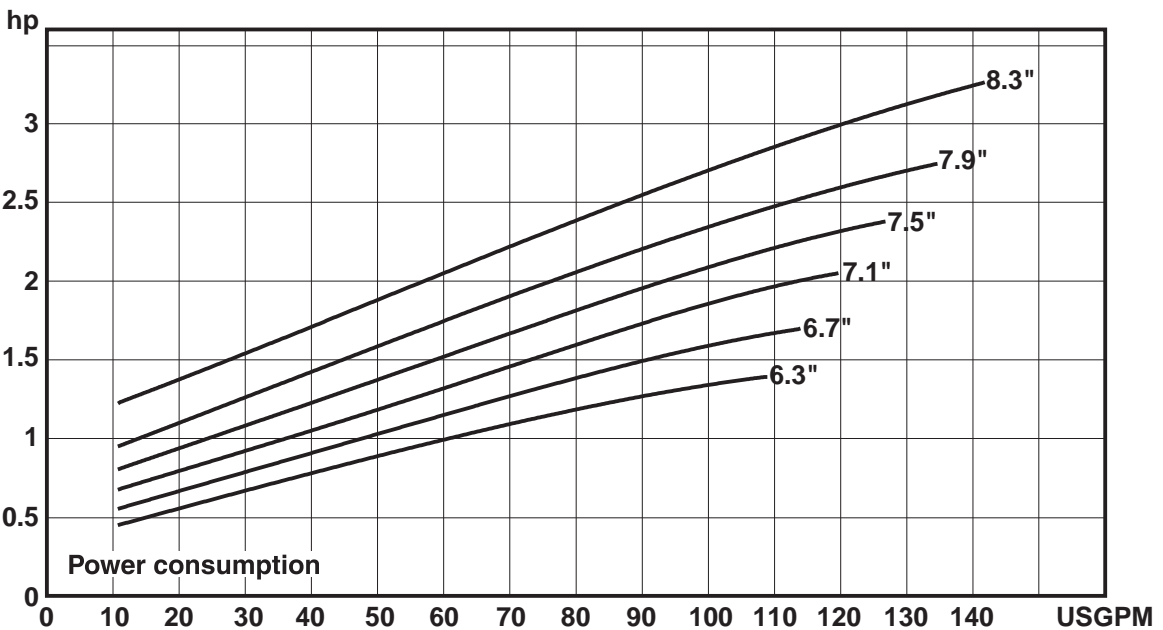
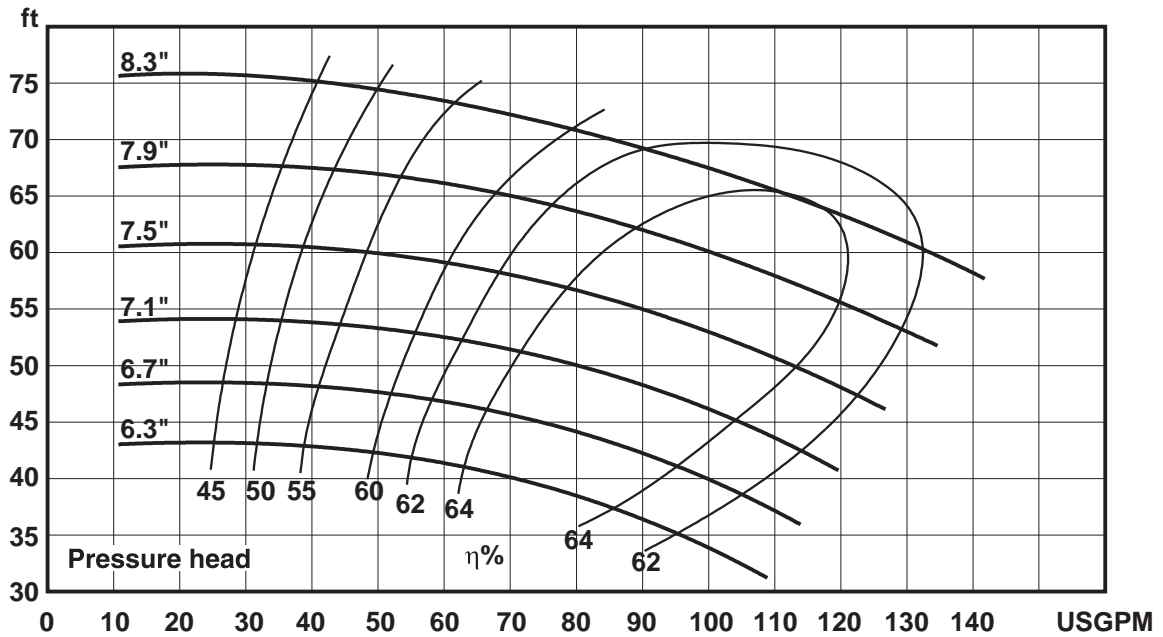




W+ SERIES MODEL W+55/35 CENTRIFUGAL PUMP CAPACITY CURVE 2.5" INLET - 1.5" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.3"
Performance data refer to water at 68°F
Permissible tolerance $\pm 5\%$

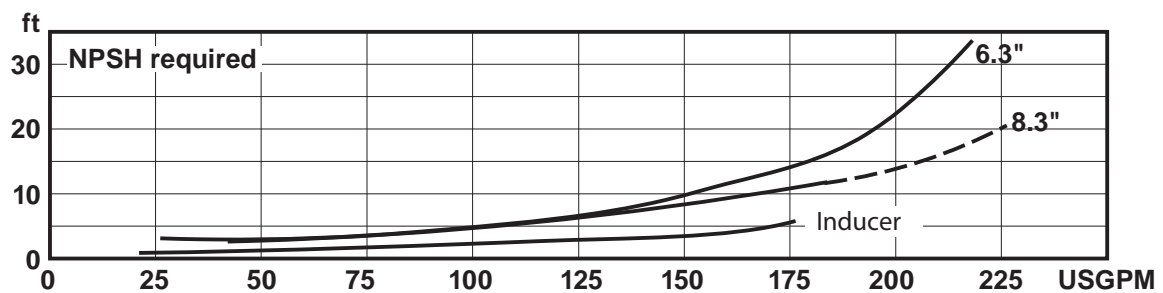
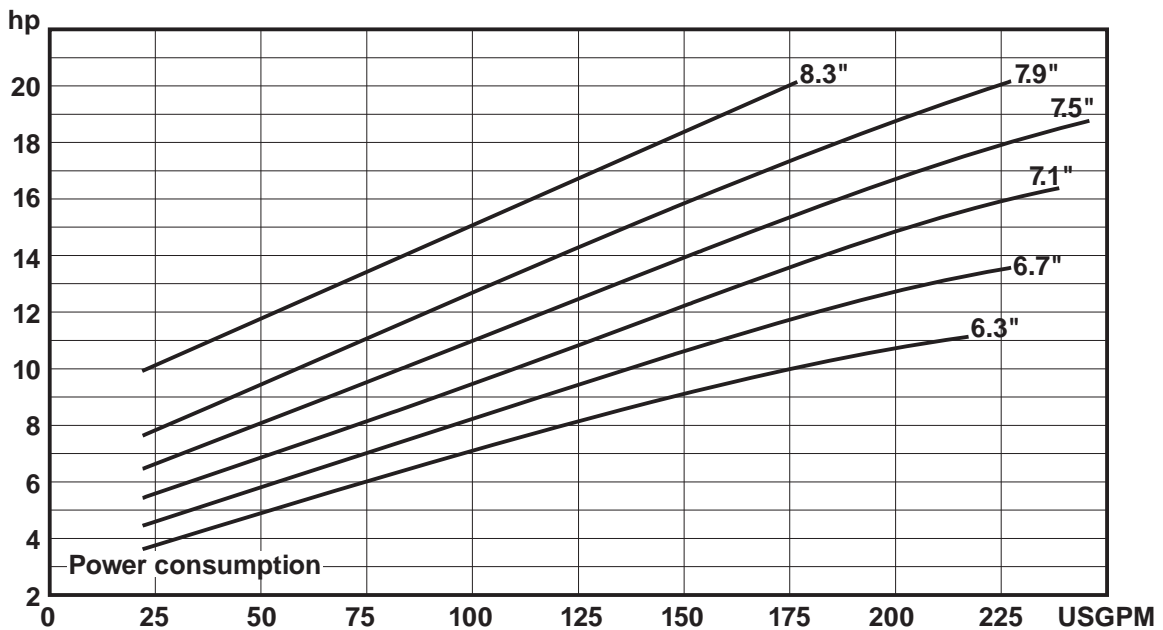
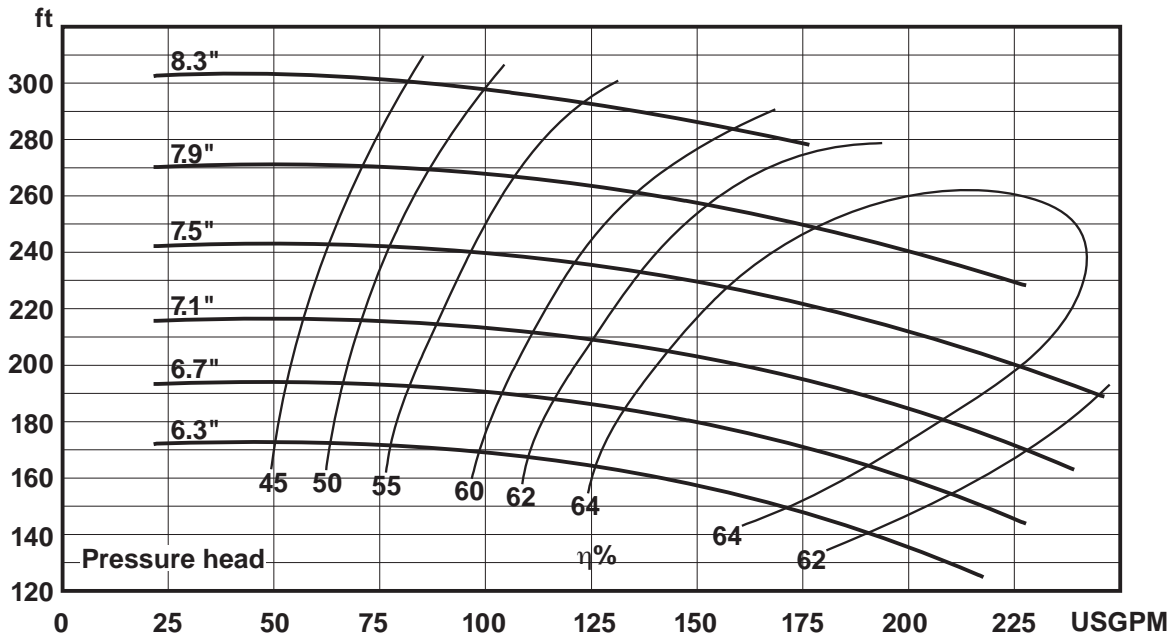




W+ SERIES MODEL W+55/60 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

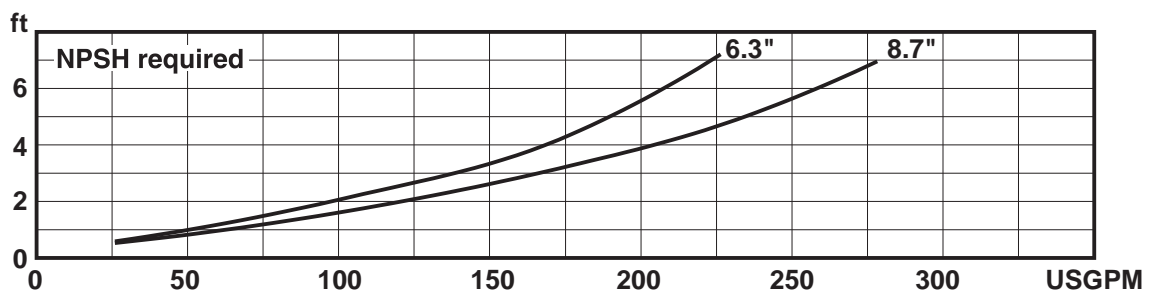
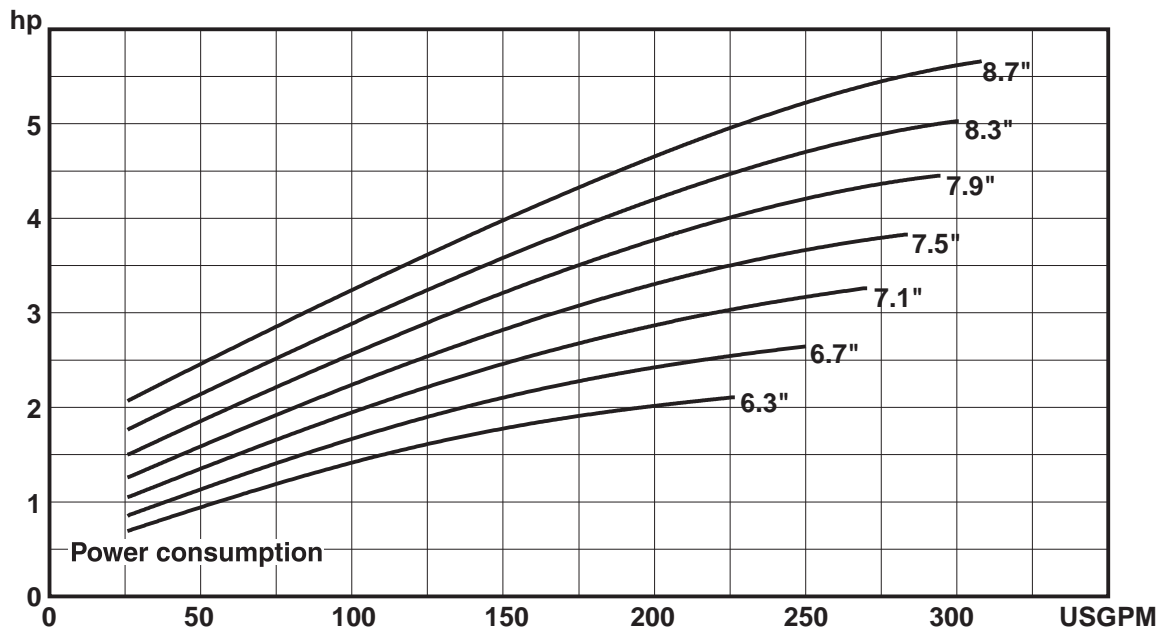
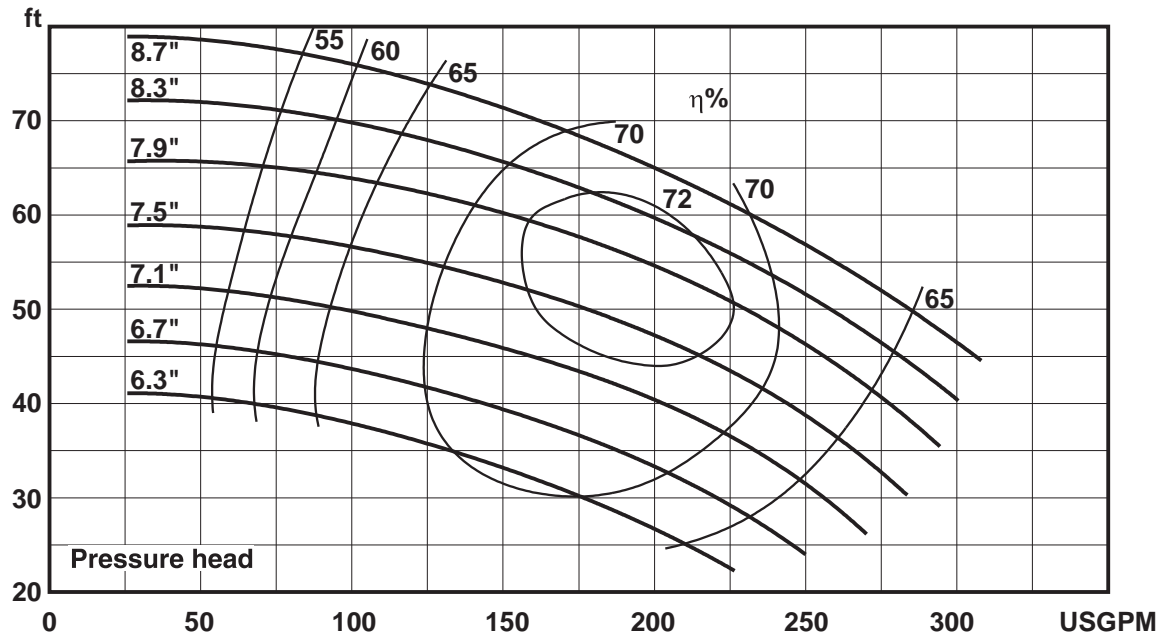




W+ SERIES MODEL W+55/60 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 8.7"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

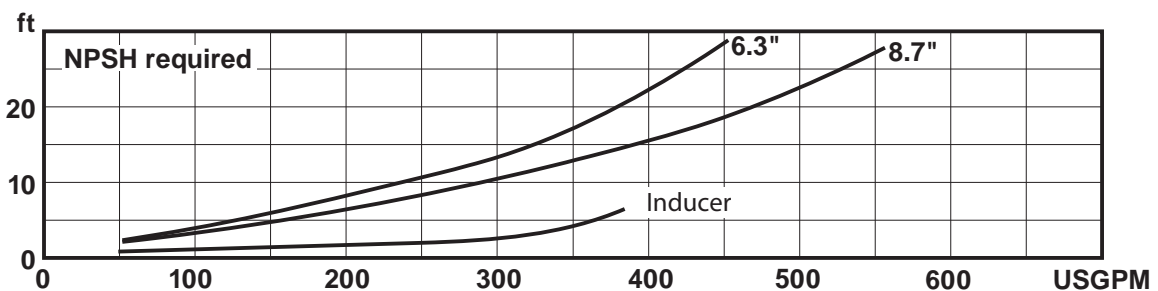
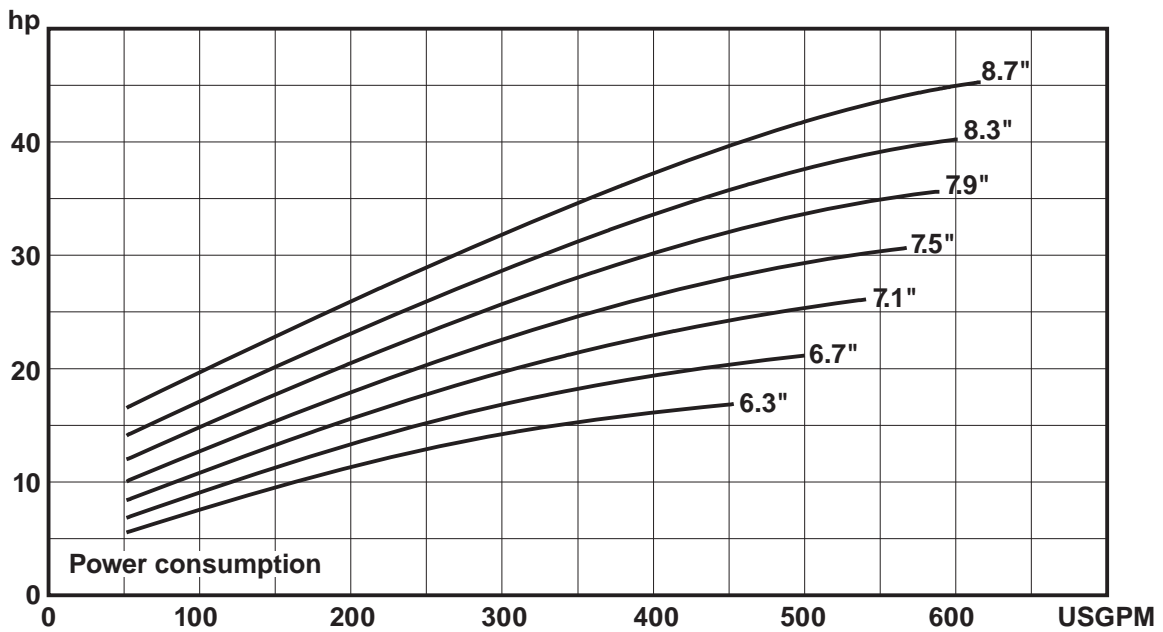
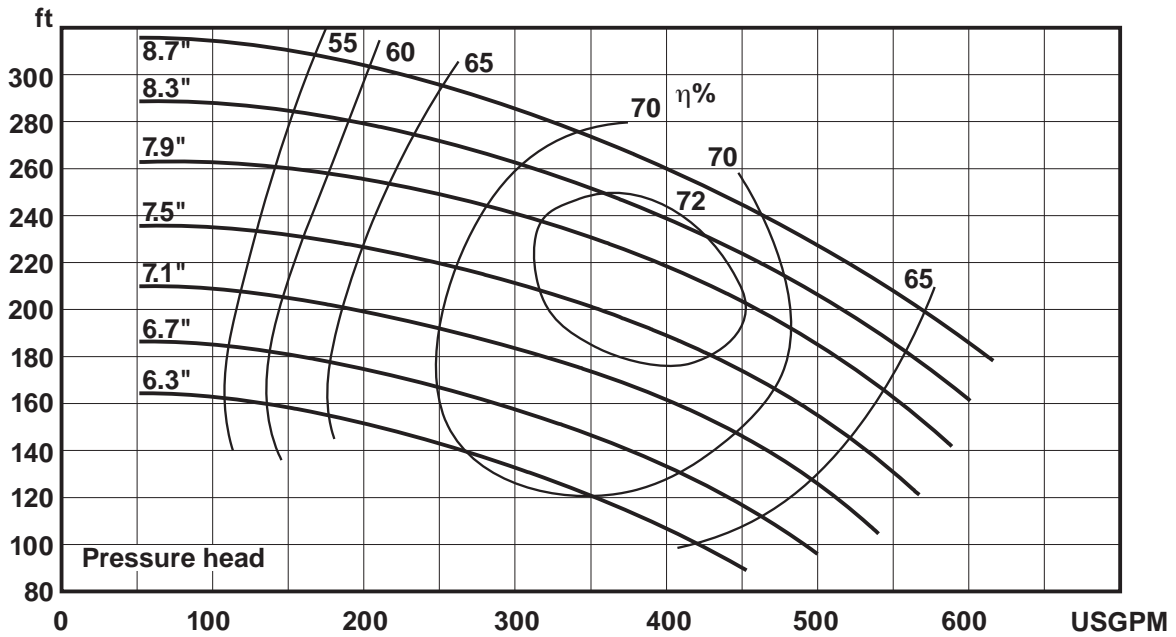




W+ SERIES MODEL W+60/110 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.1"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

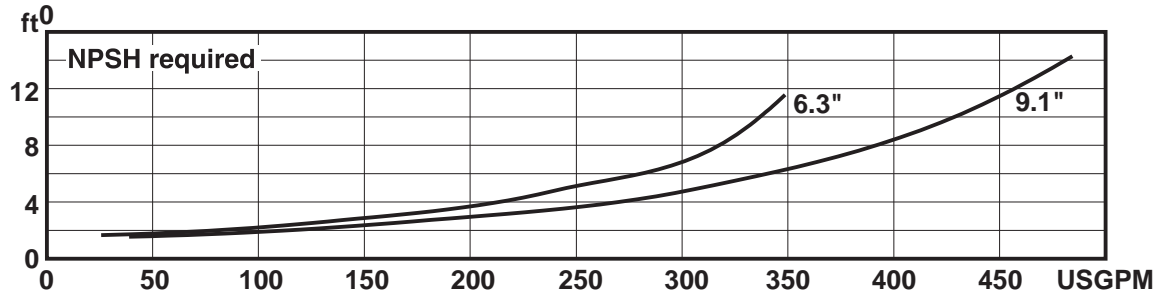
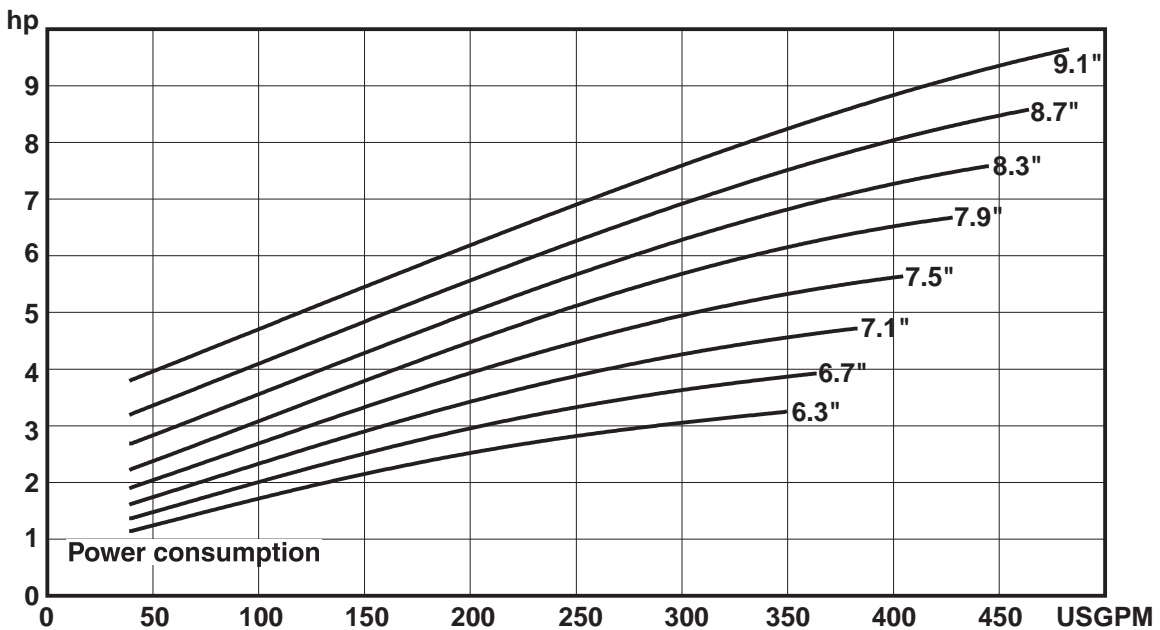
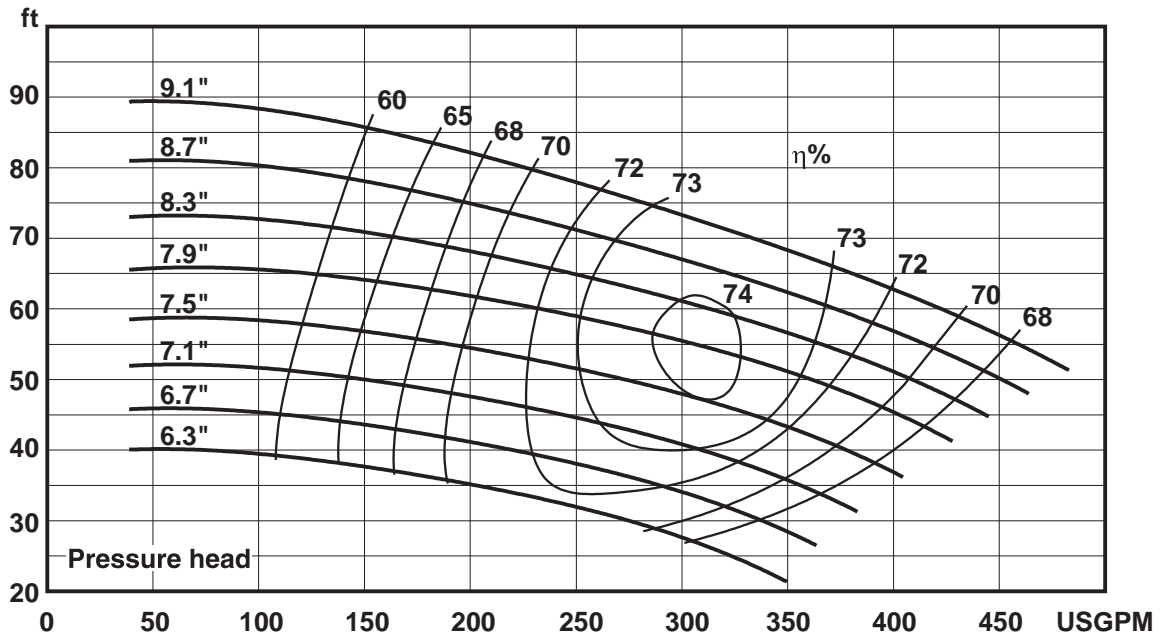




W+ SERIES MODEL W+60/110 CENTRIFUGAL PUMP CAPACITY CURVE 4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.1"
 Performance data refer to water at 68°F
 Permissible tolerance $\pm 5\%$

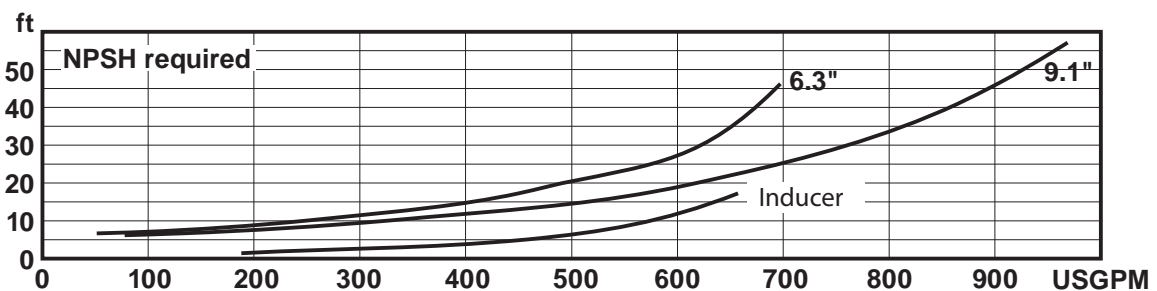
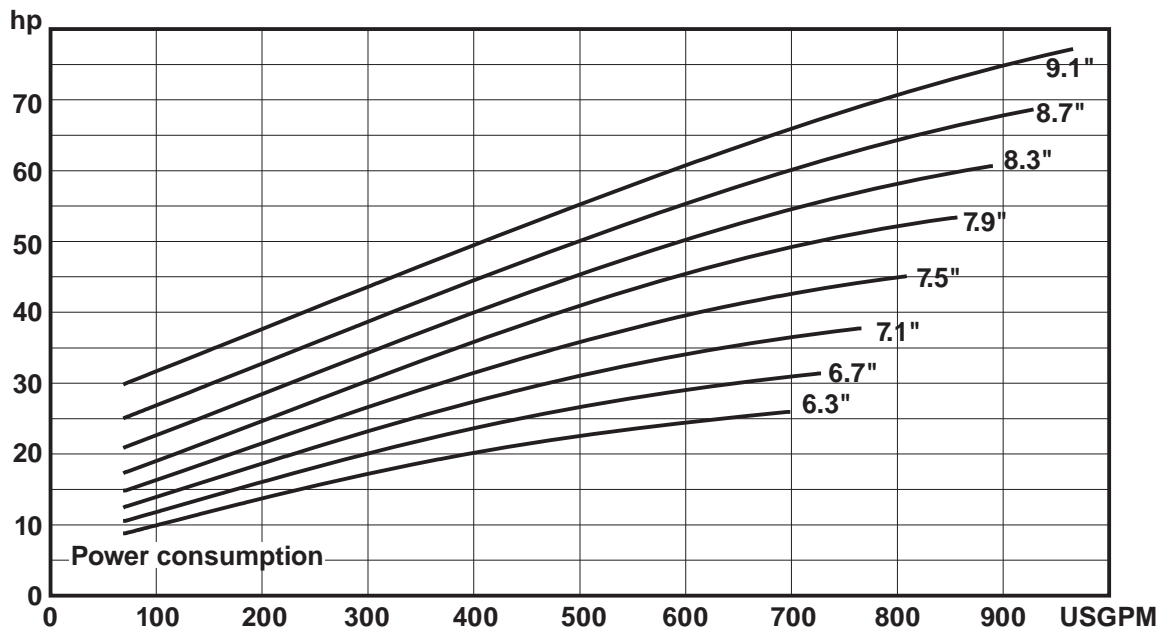
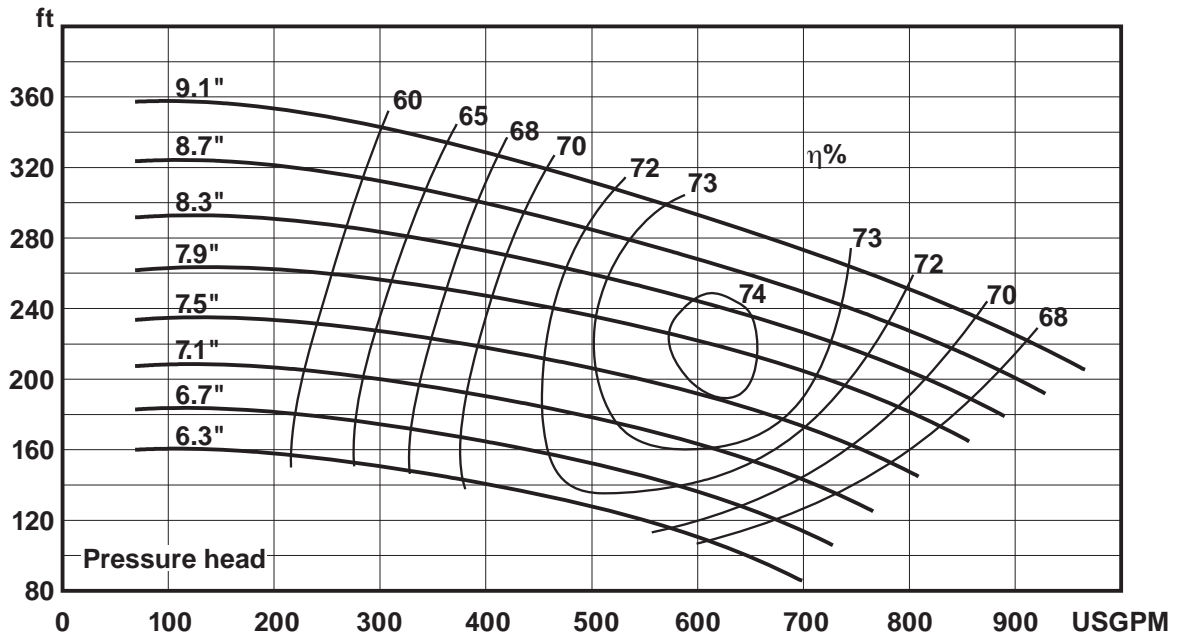




W+ SERIES MODEL W+65/350 CENTRIFUGAL PUMP CAPACITY CURVE
6" INLET - 4" OUTLET, 1750 RPM, 60 Hz

NOTE: _____




Impeller dia: Max: 10.2"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

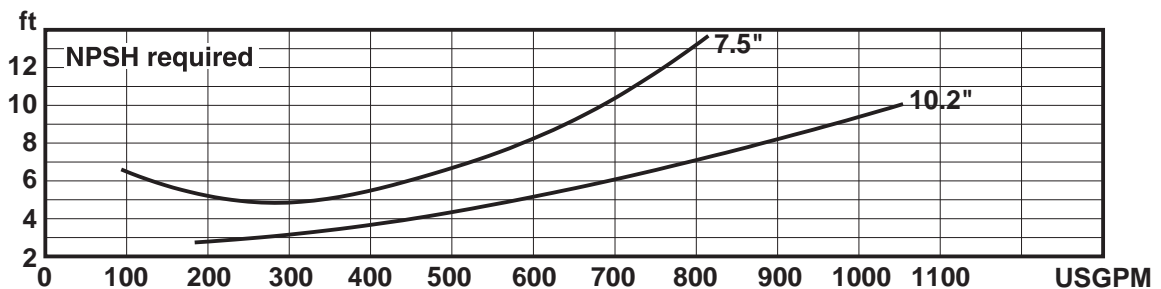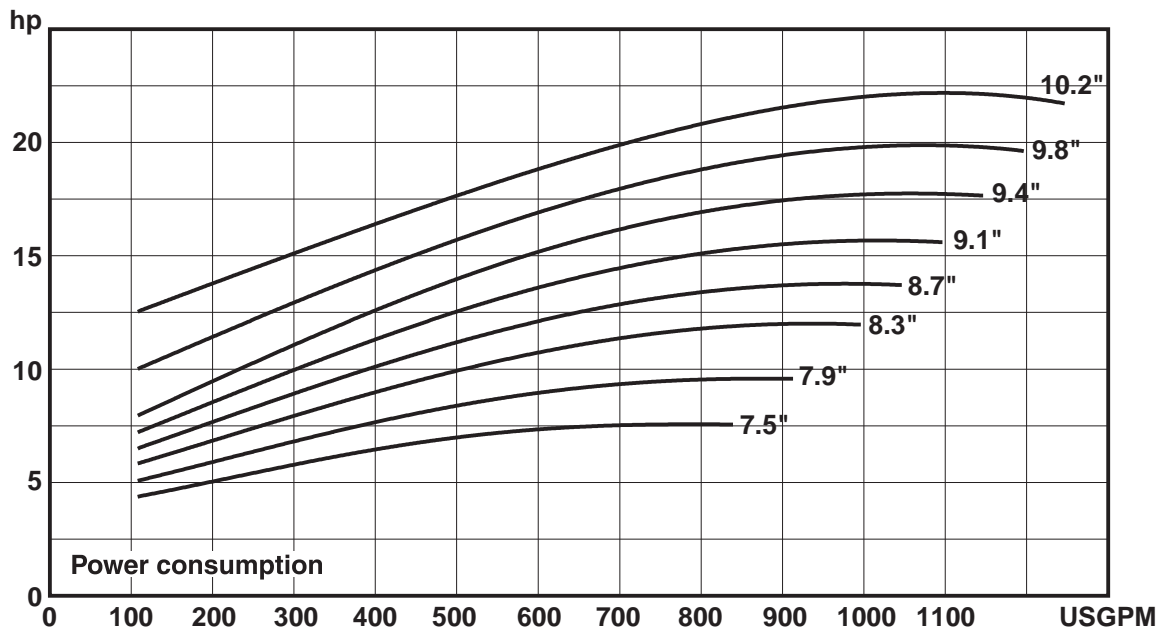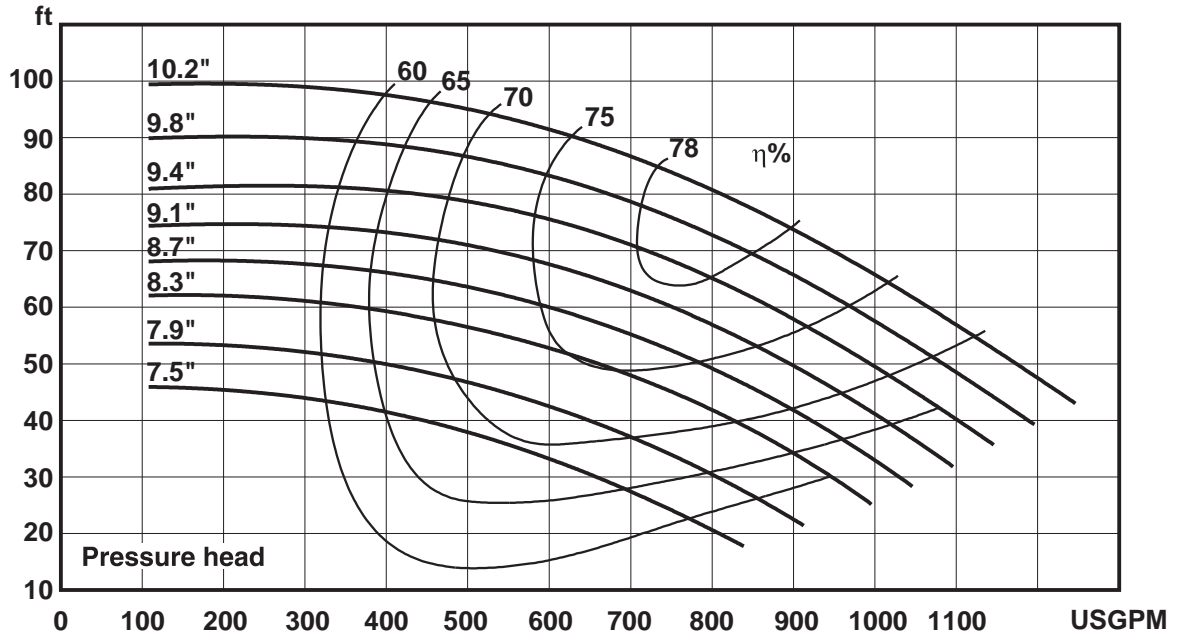

W+ SERIES MODEL W+65/350 CENTRIFUGAL PUMP CAPACITY CURVE 6" INLET - 4" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.8"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

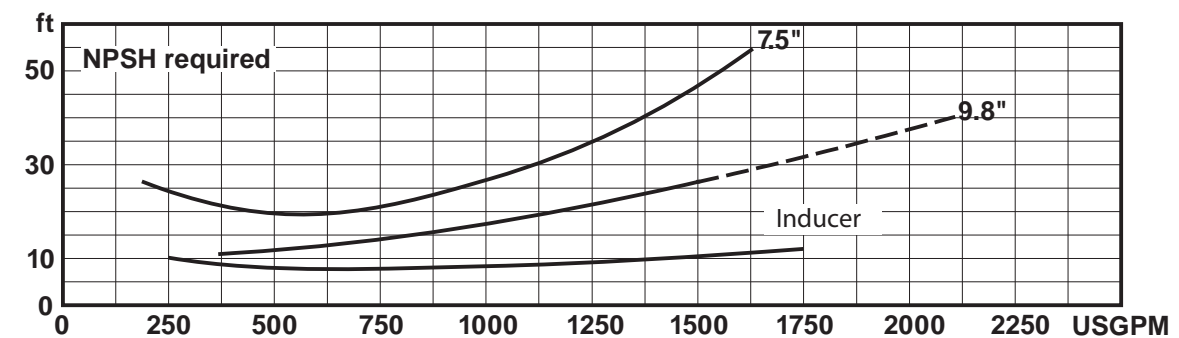
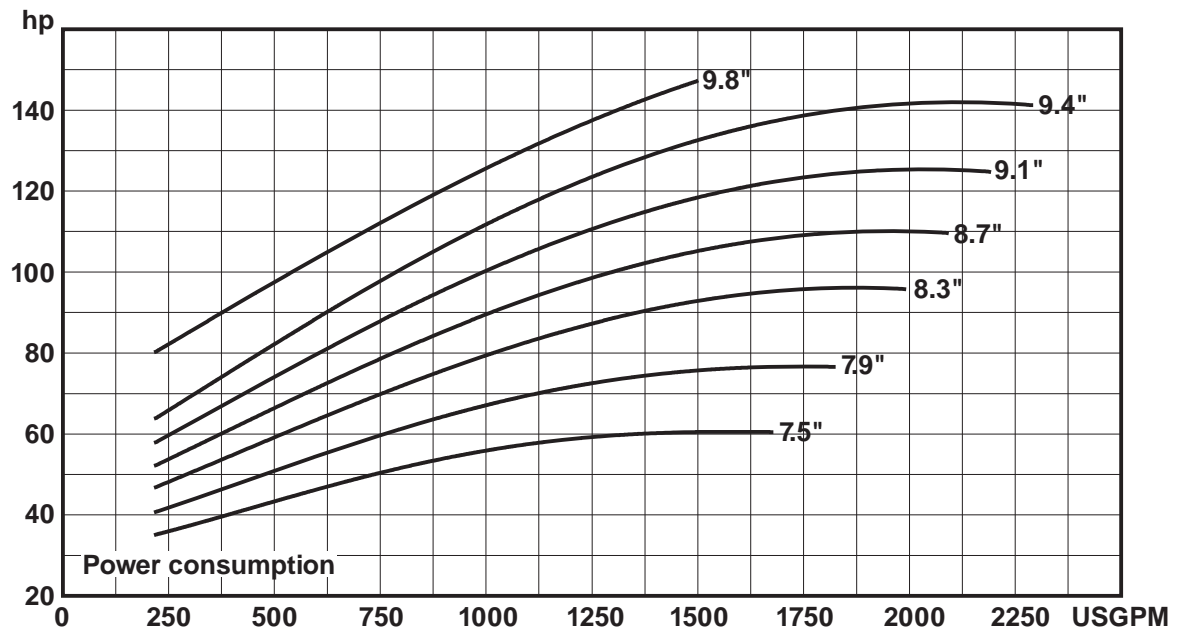
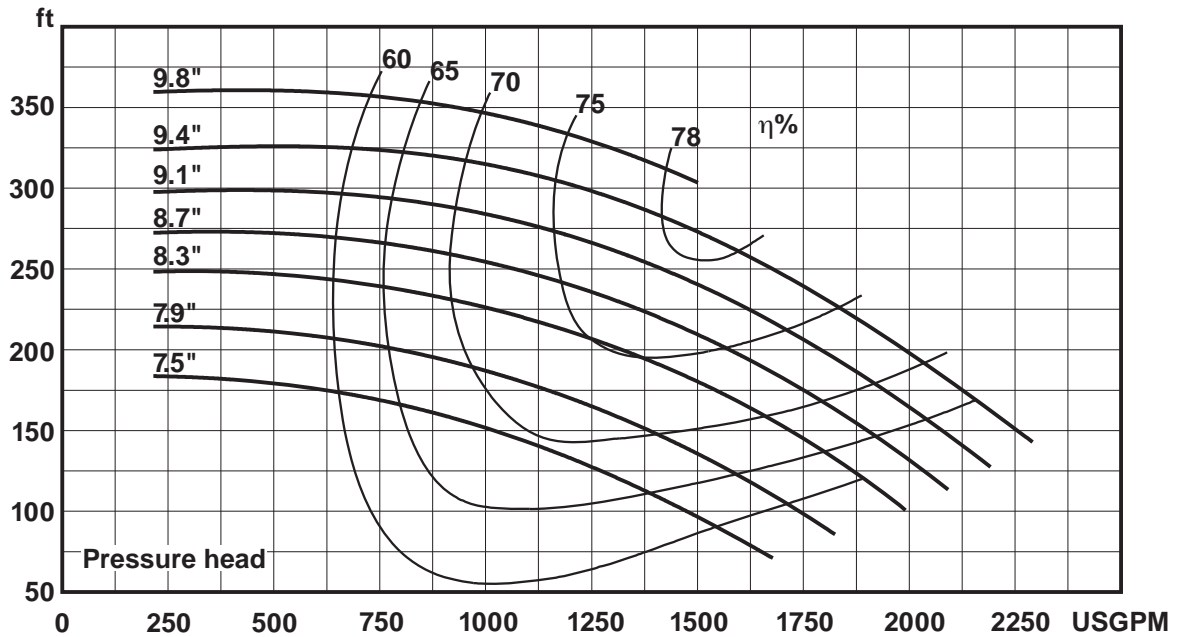




W+ SERIES MODEL W+70/40 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

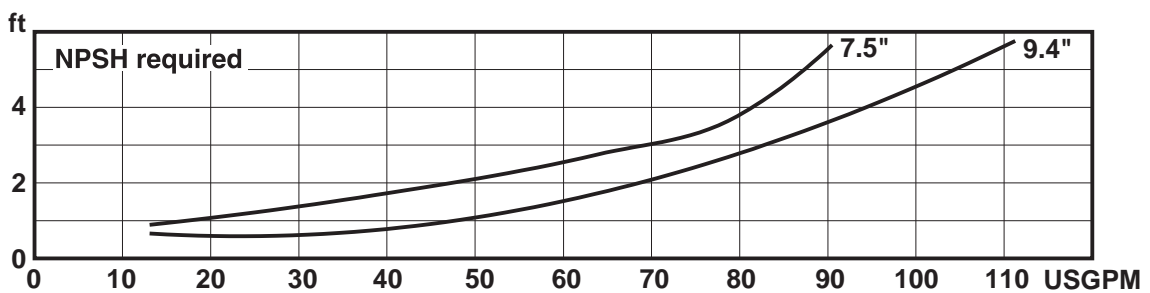
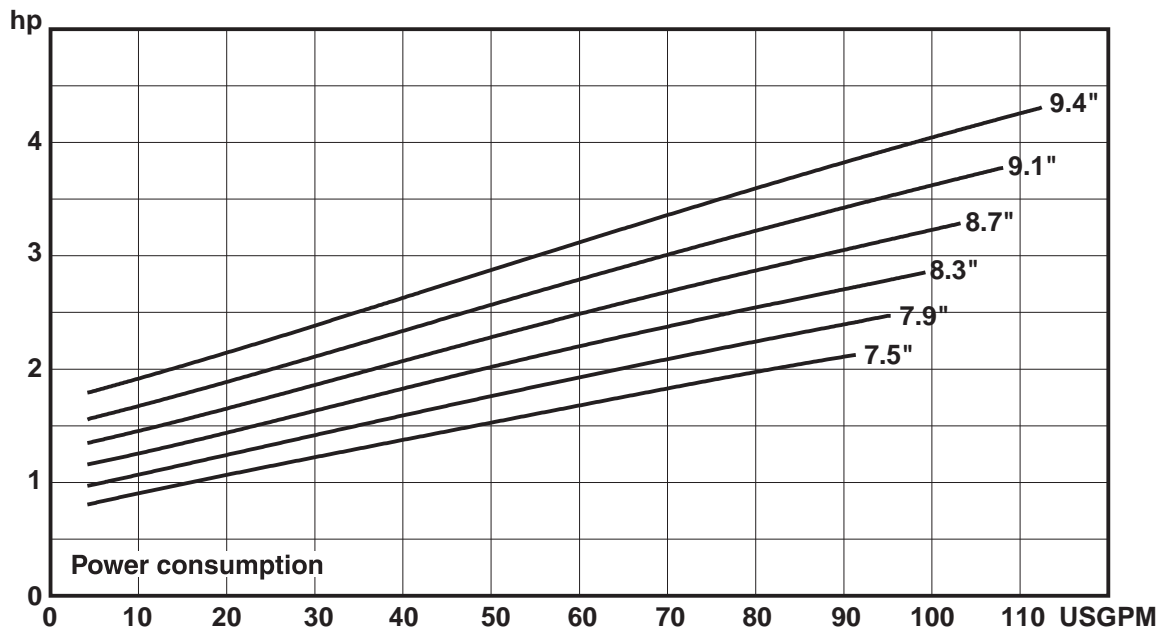
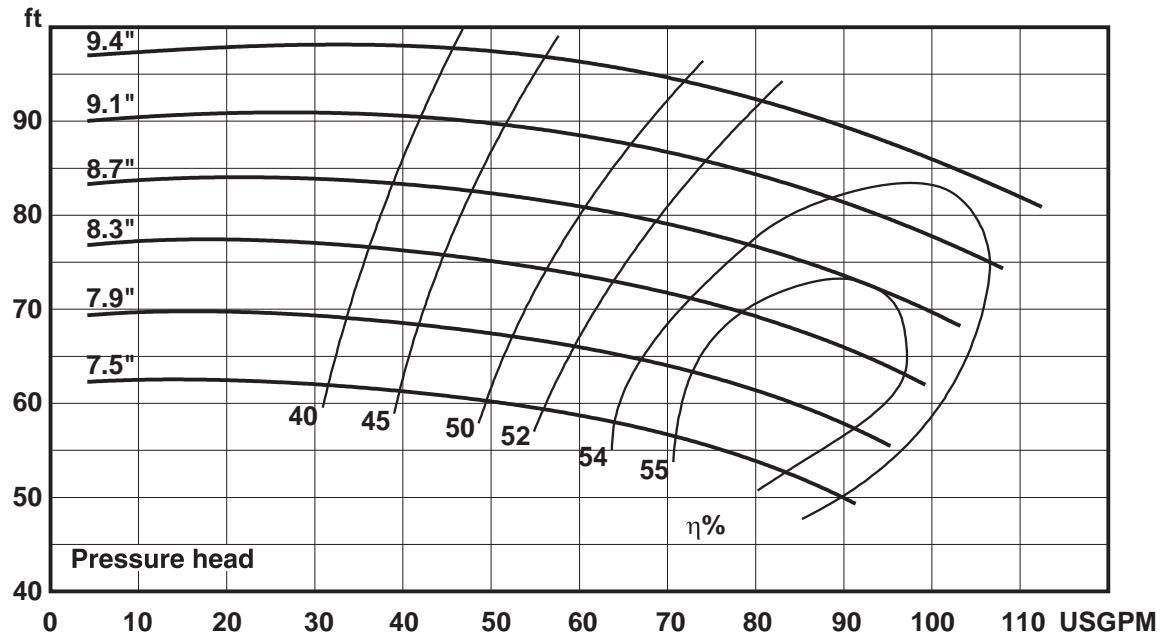




W+ SERIES MODEL W+70/40 CENTRIFUGAL PUMP CAPACITY CURVE
2.5" INLET - 1.5" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 9.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

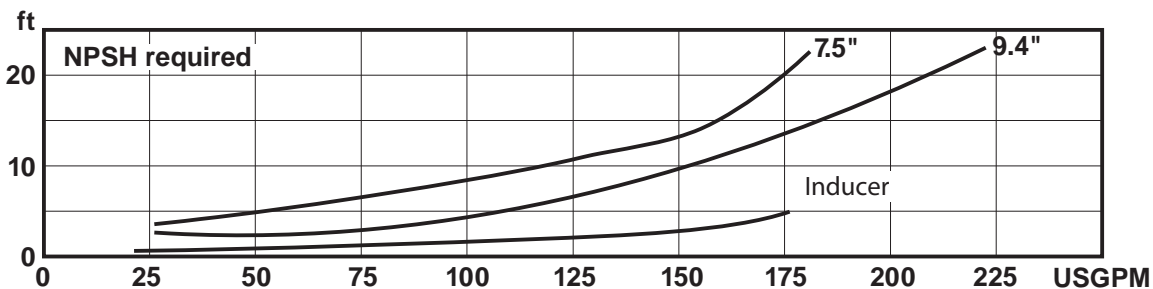
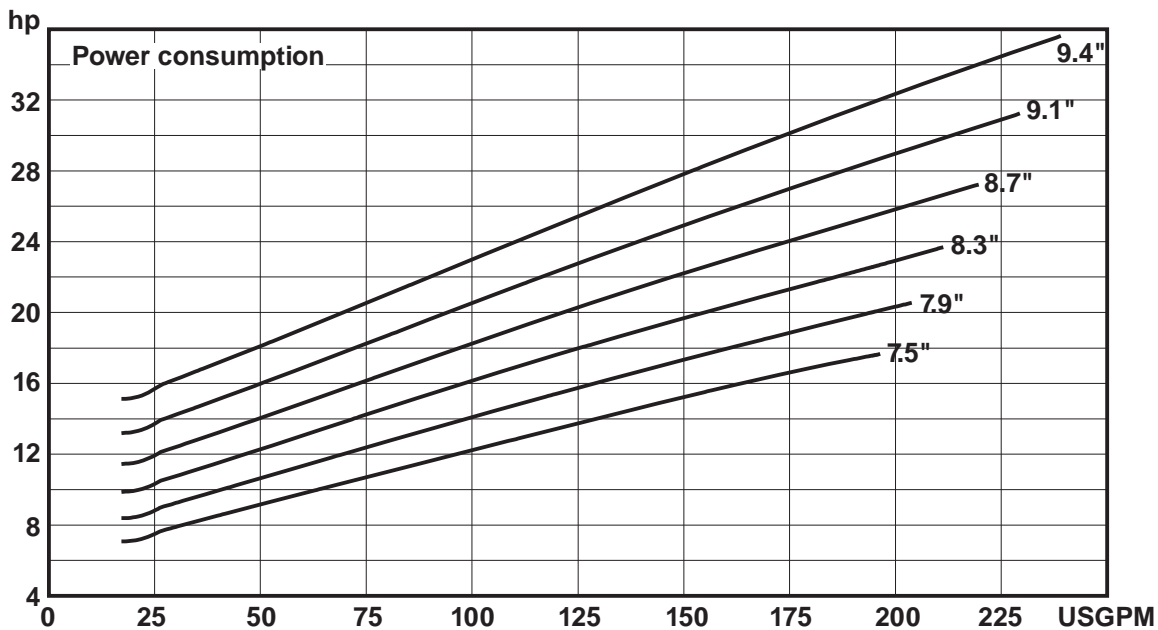
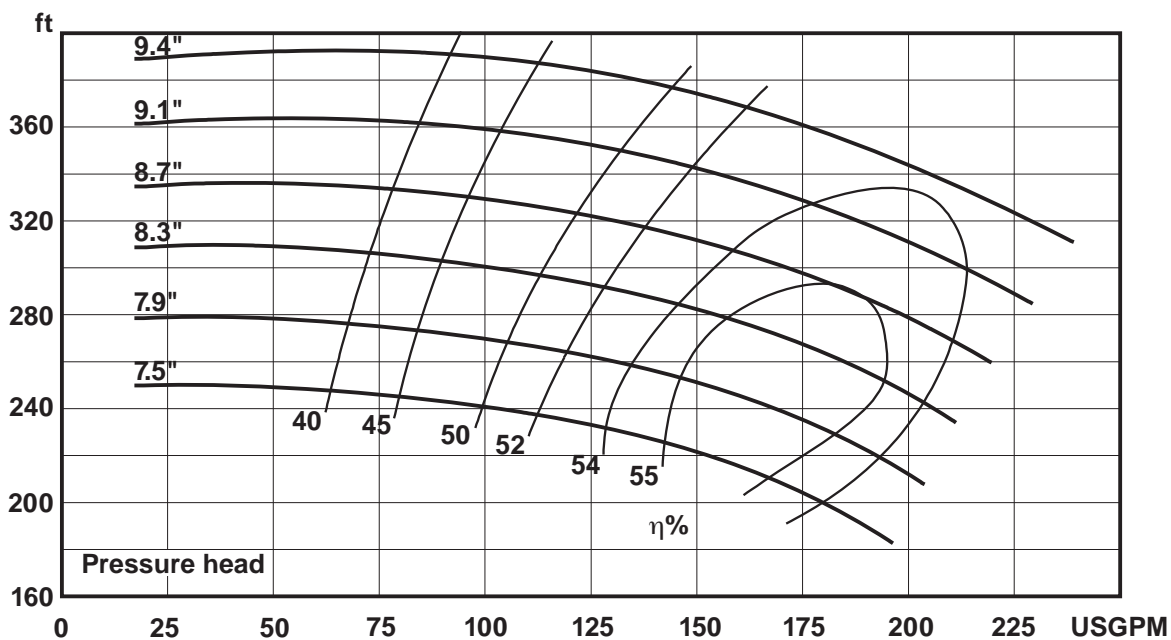




W+ SERIES MODEL W+80/80 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 10.0"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

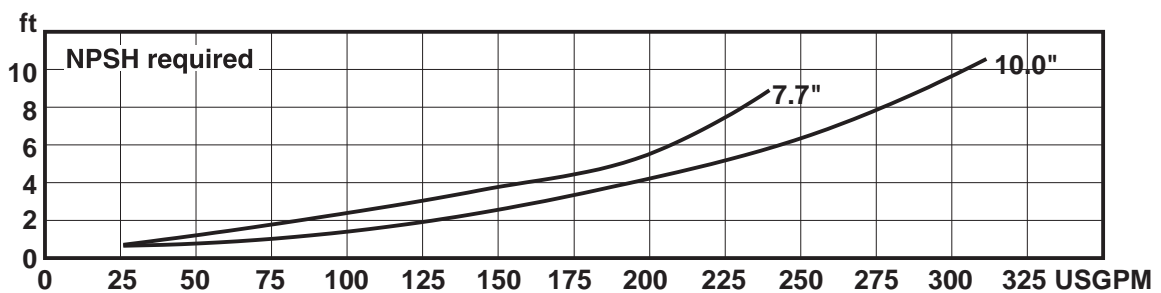
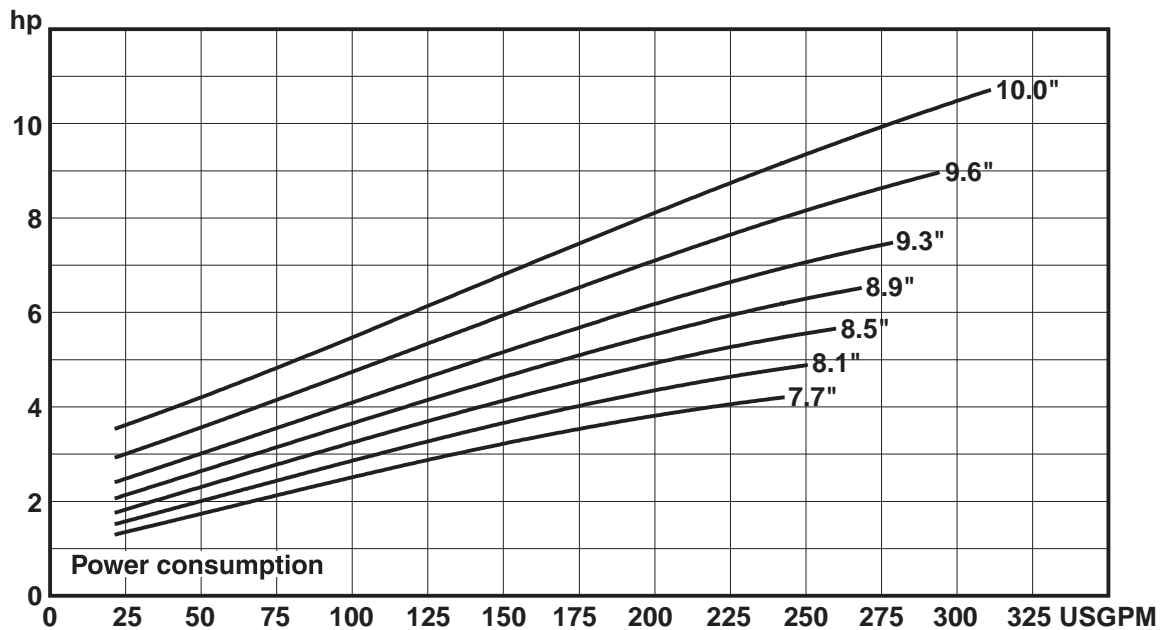
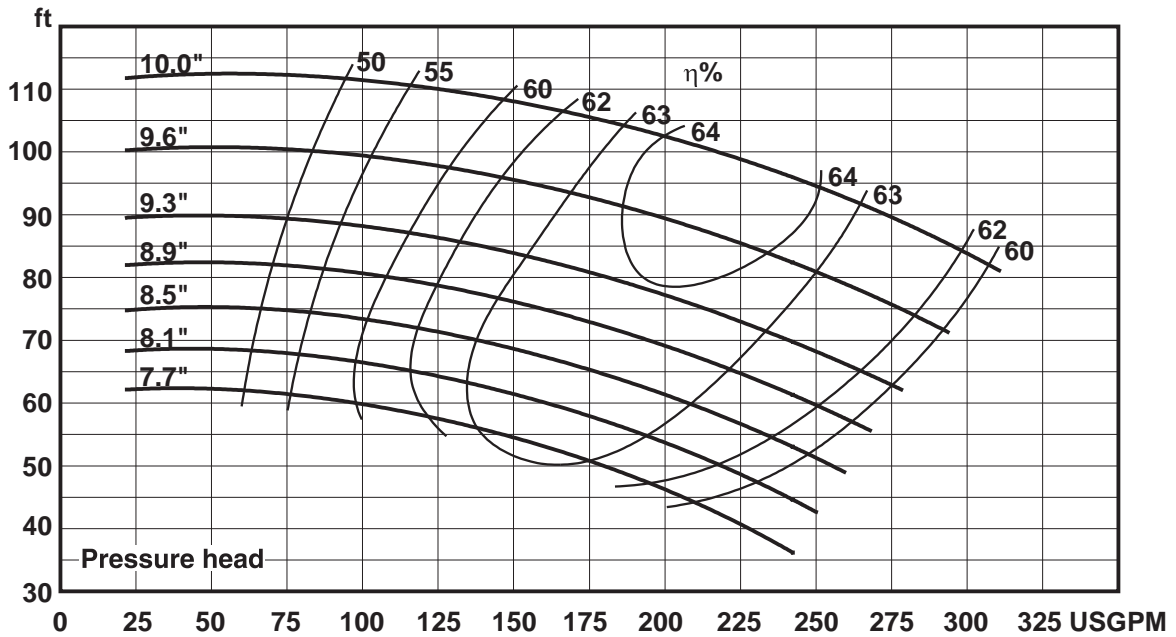




W+ SERIES MODEL W+80/80 CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 10.0"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

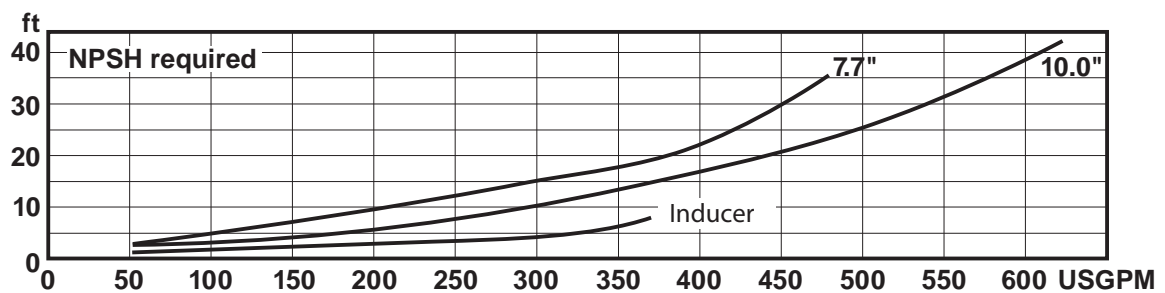
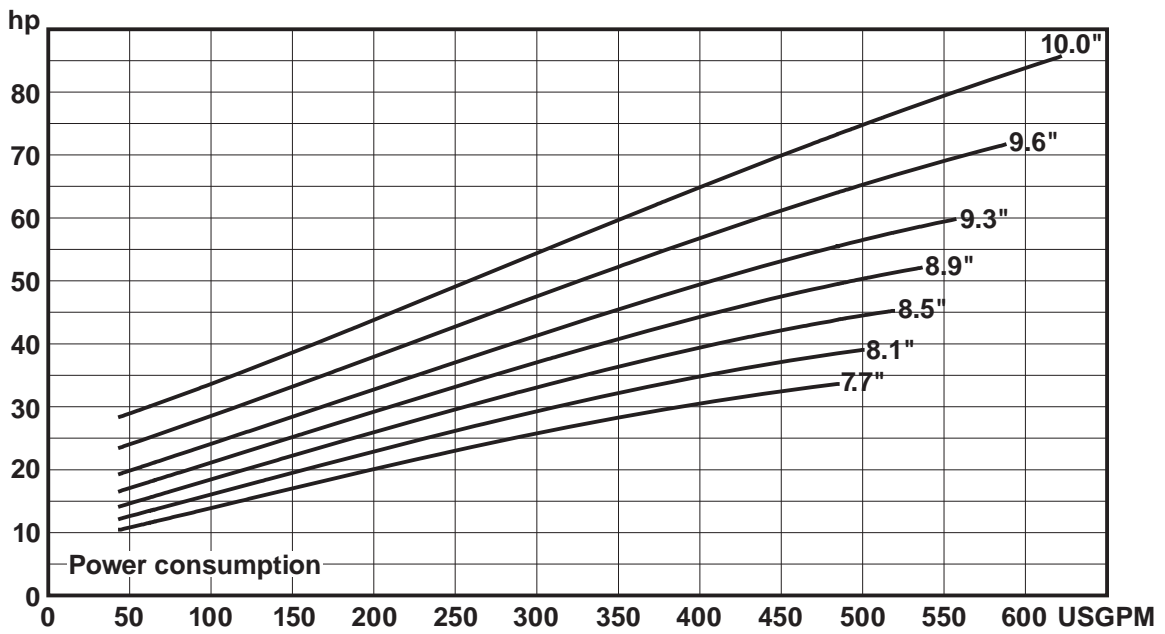
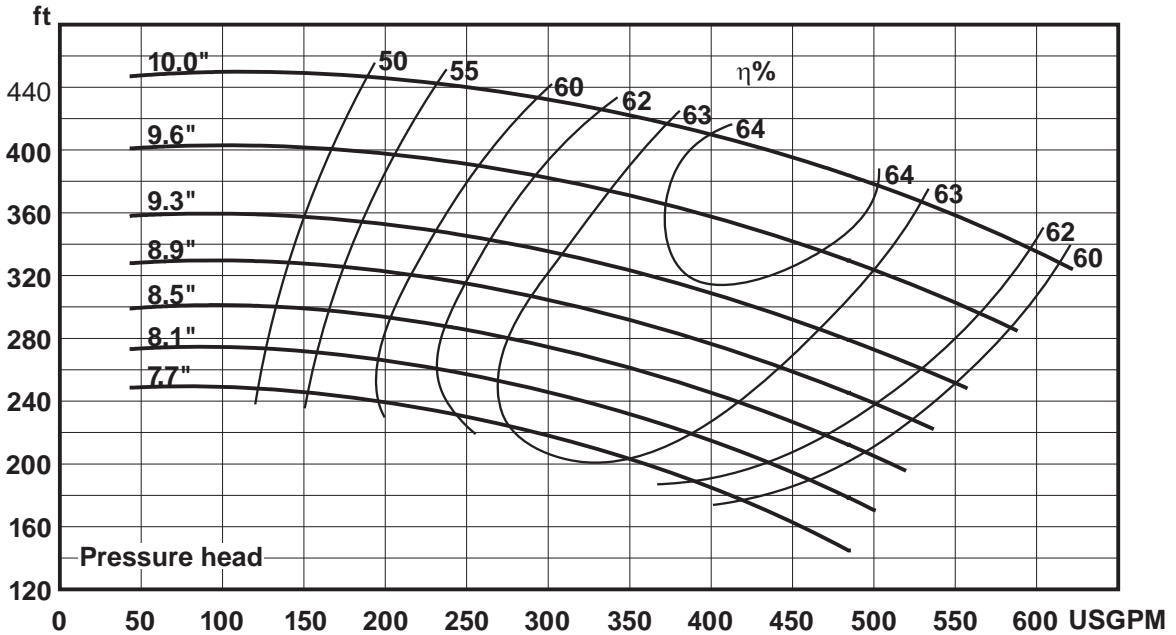




W+ SERIES MODEL W+110/130 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 1750 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 11.4"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

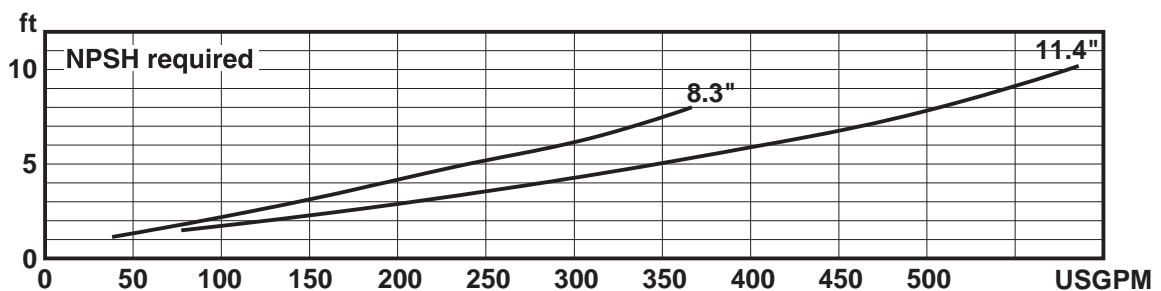
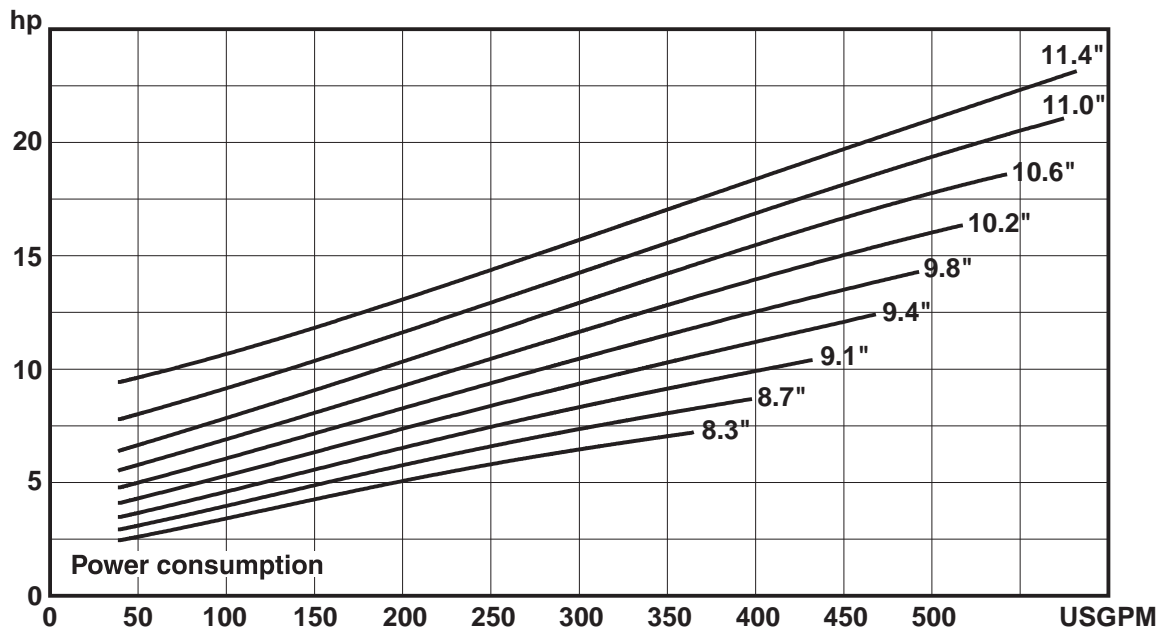
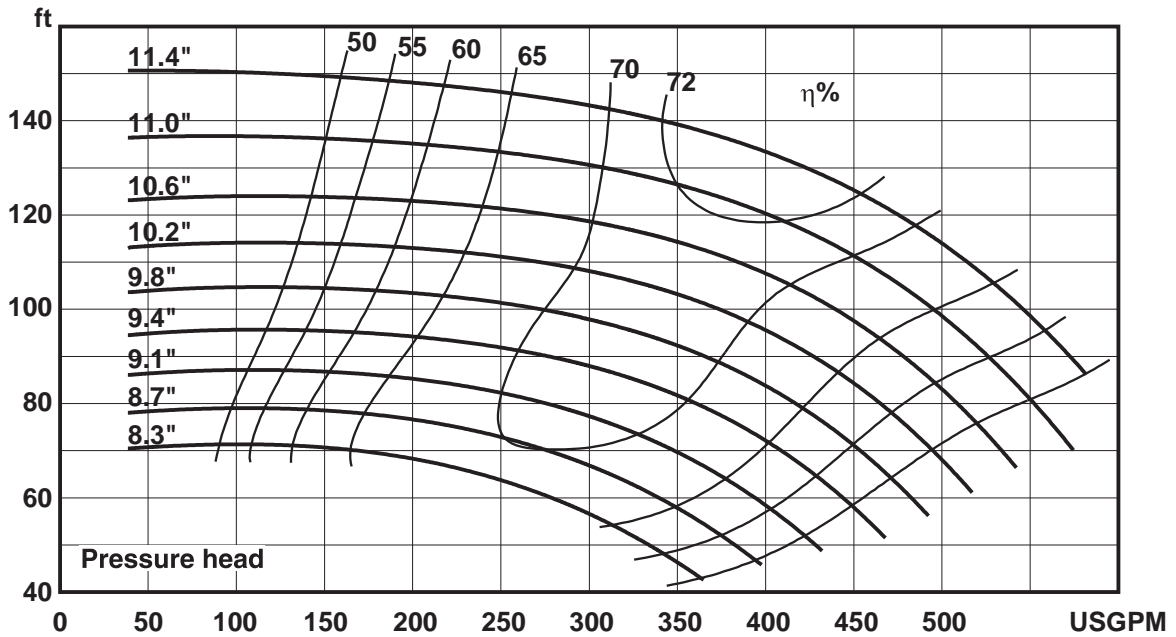




W+ SERIES MODEL W+110/130 CENTRIFUGAL PUMP CAPACITY CURVE
4" INLET - 3" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 11.4"
Performance data refer to water at 68°F
Permissible tolerance ± 5%

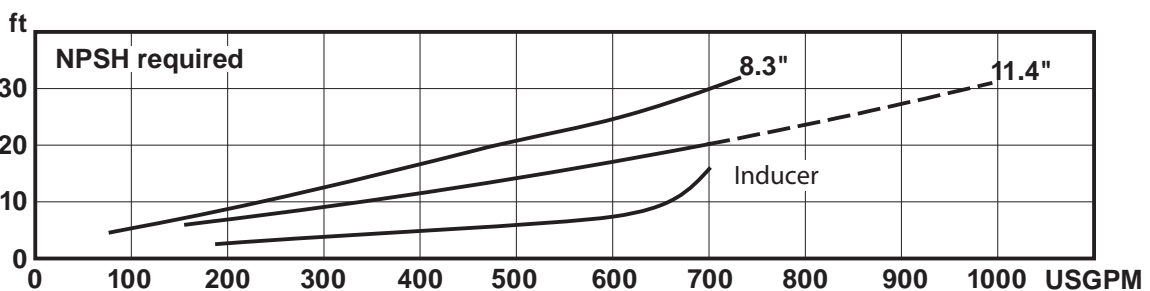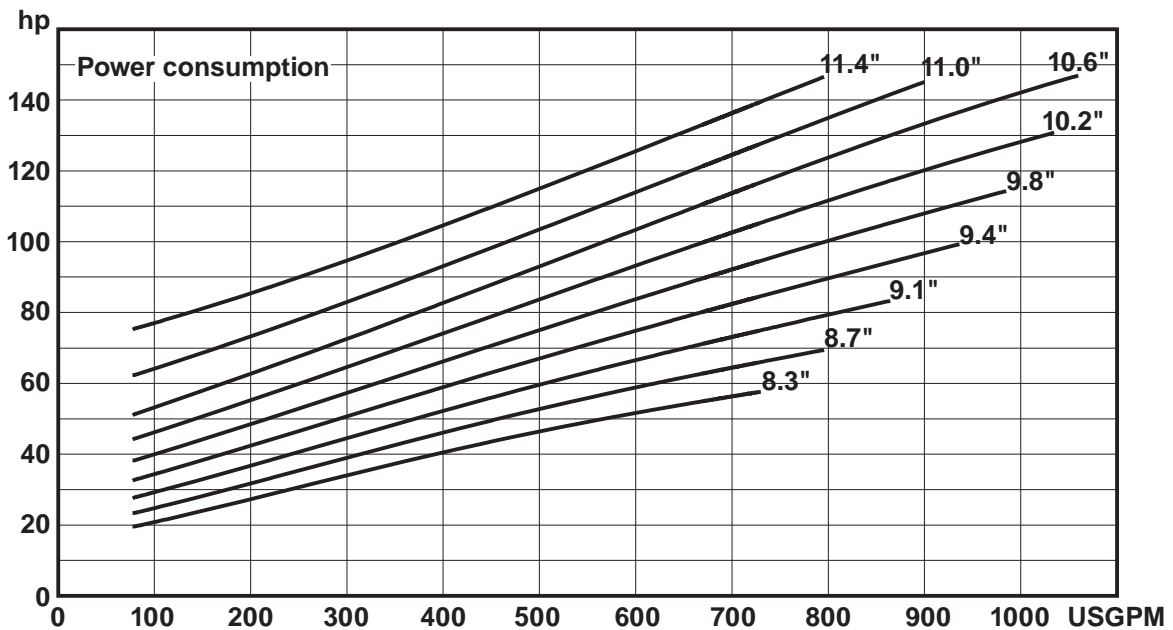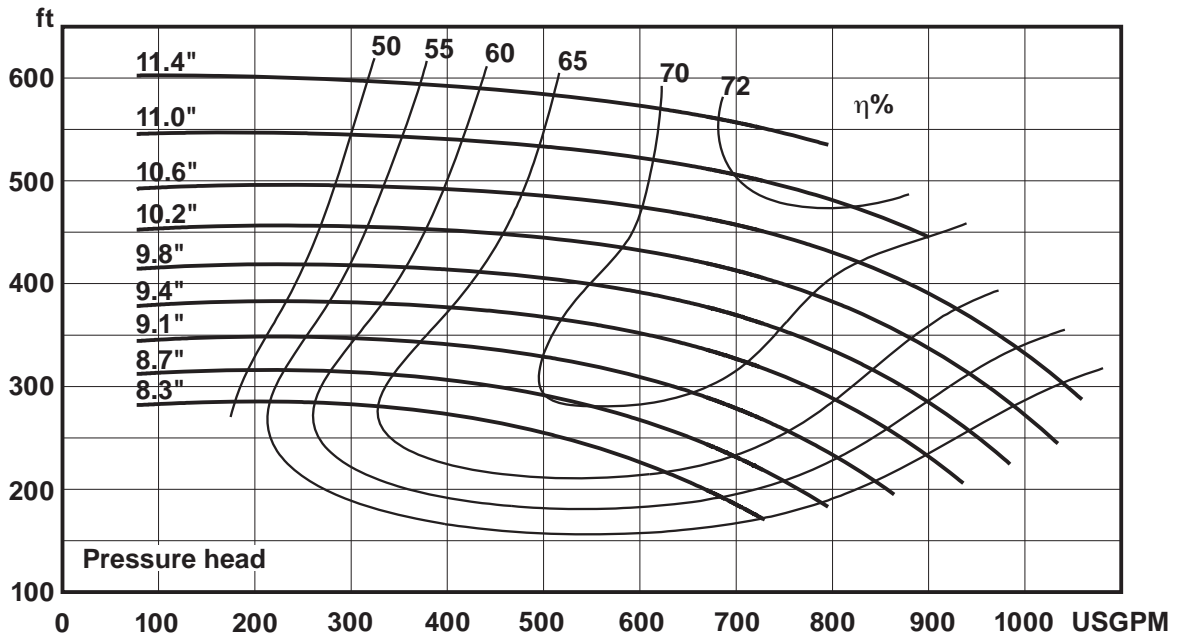




W+ SERIES MODEL W+140/50 2-STAGES CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____




Impeller dia: Max: 7.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

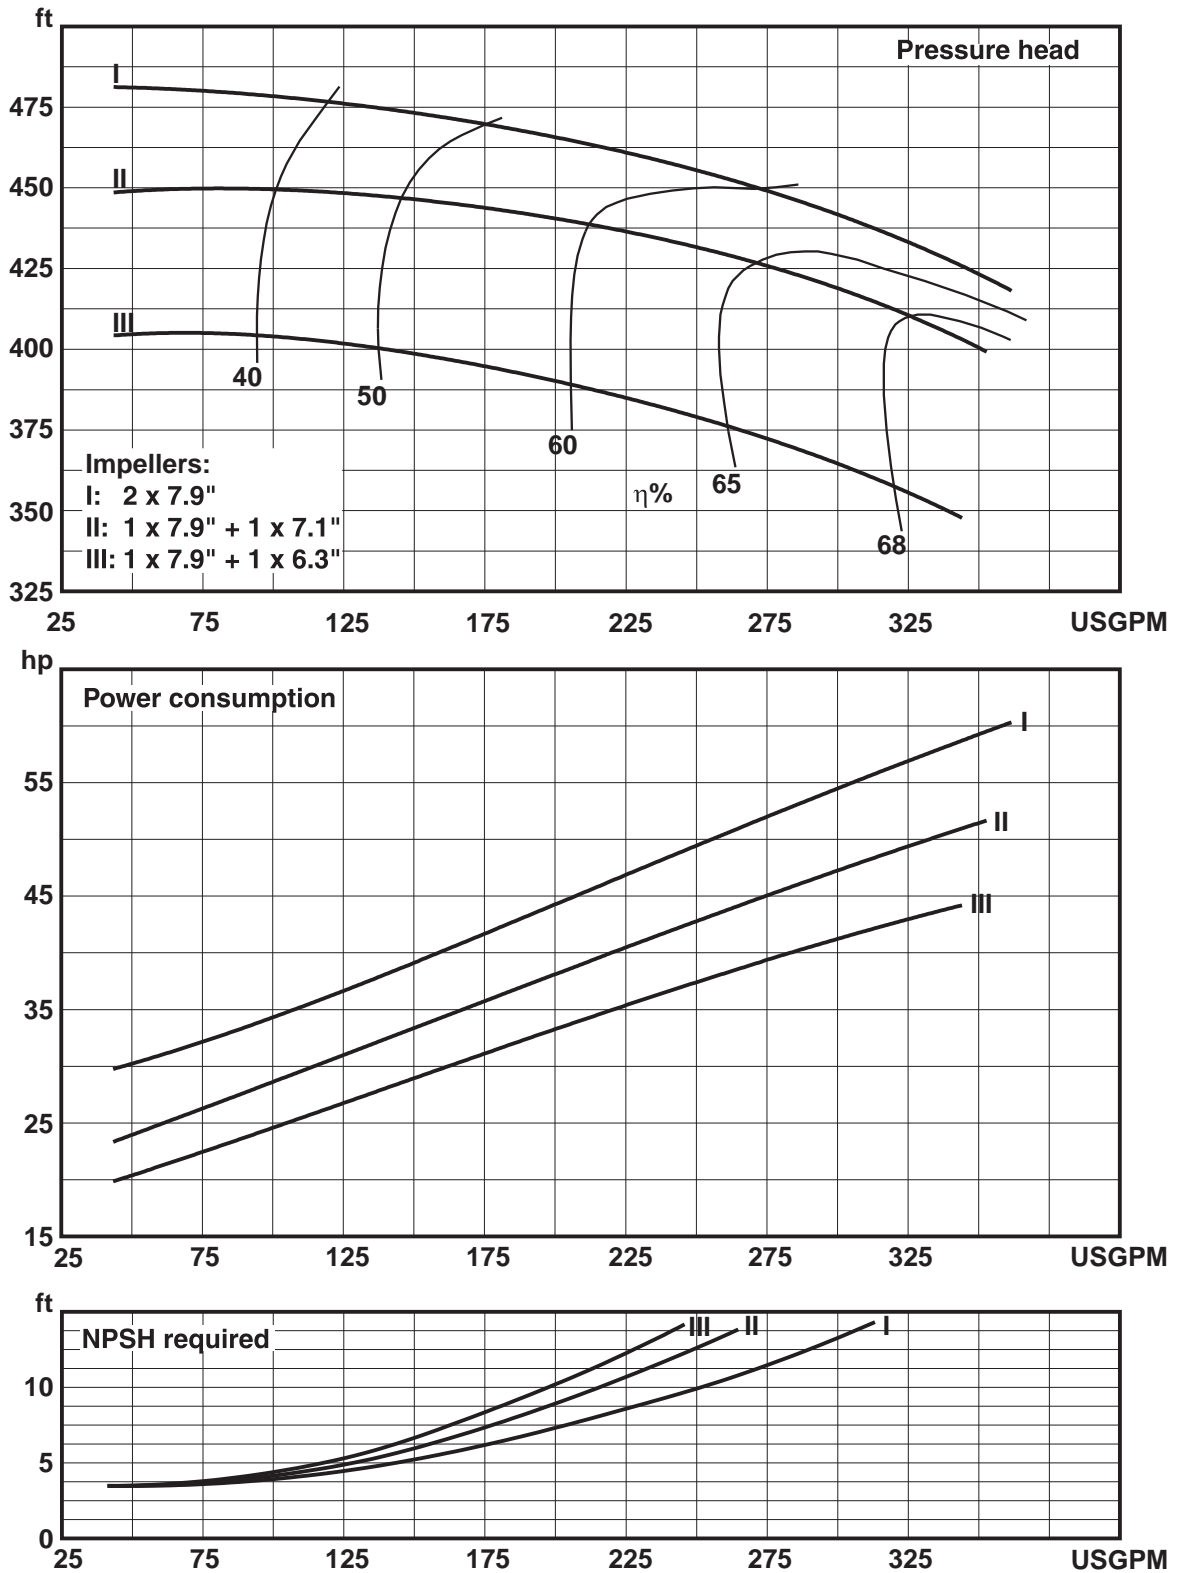

W+ SERIES MODEL W+140/50 3-STAGES CENTRIFUGAL PUMP CAPACITY CURVE
3" INLET - 2" OUTLET, 3500 RPM, 60 Hz

NOTE: _____

Impeller dia: Max: 7.9"
 Performance data refer to water at 68°F
 Permissible tolerance ± 5%

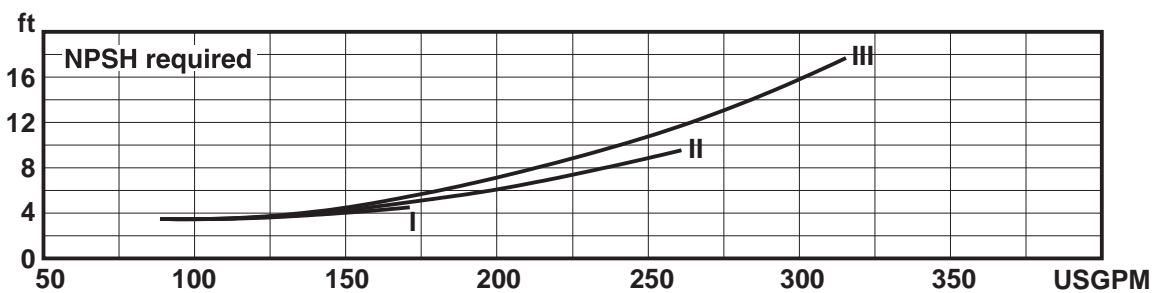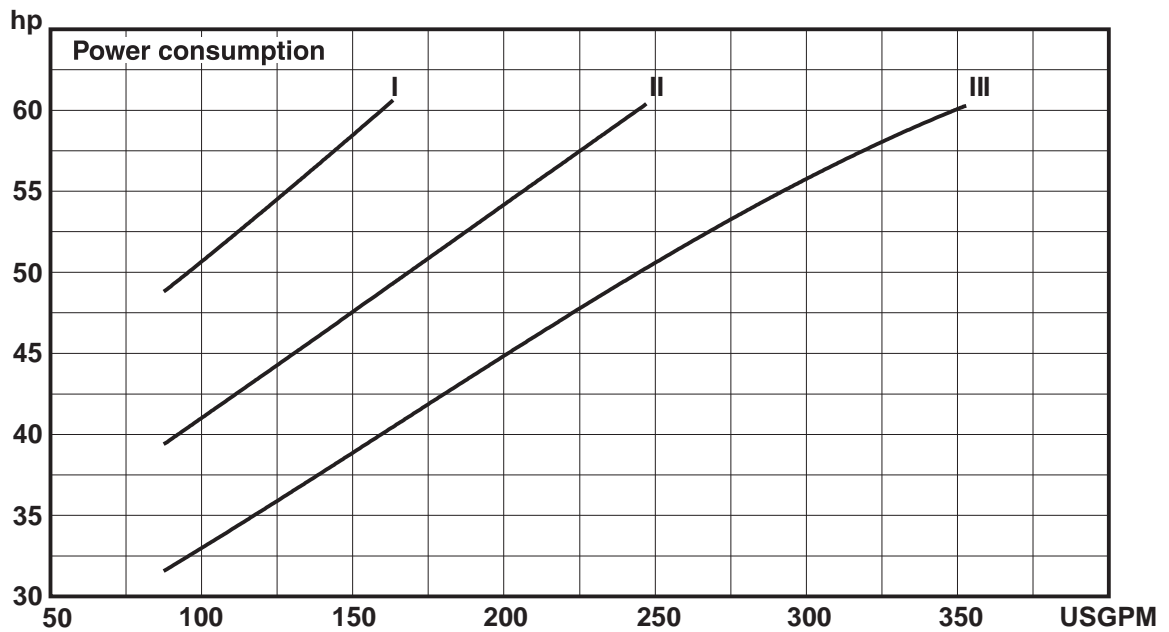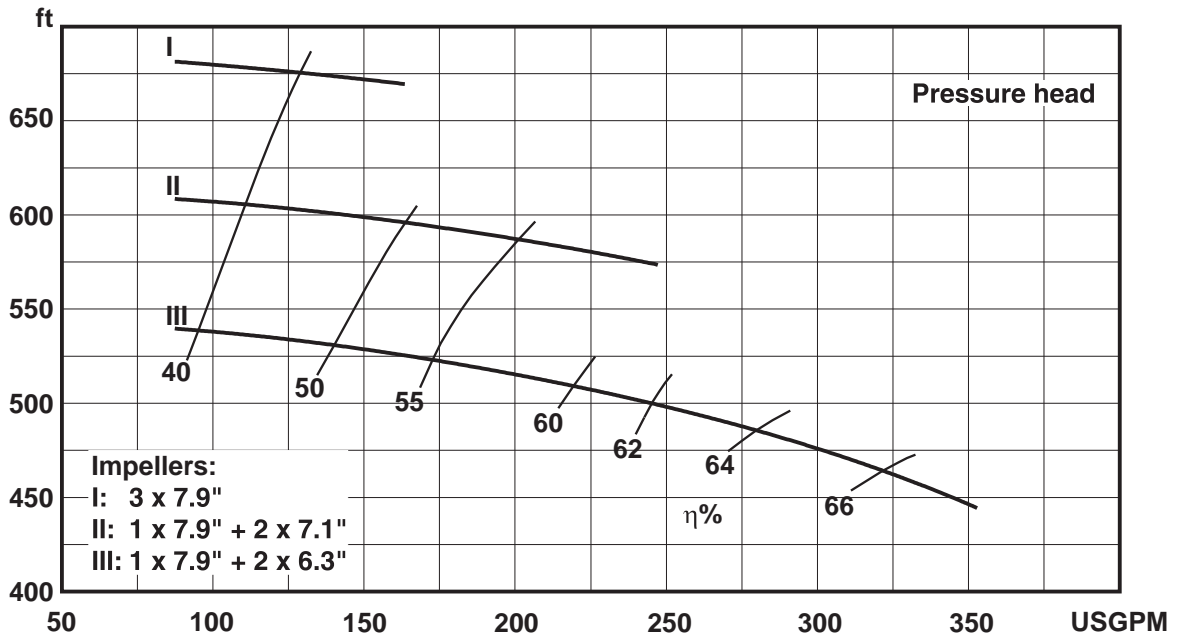



Your local contact:



Provided by:



www.hollandapt.com

Phone: 800-800-8464

SPX Flow Technology
Phone: (888) 278-4321
Email: answers.us@apv.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit www.apv.com.

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Issued: 06/2010 7020-01-06-2010-US

Copyright © 2010 SPX Corporation