



Pure-Flo®

www.hollandapt.com Phone: 800-800-8464

Zero Static Block Body Tee (ZSBBT)

Zero Static use points are some of the most critical valves utilized in the Biopharmaceutical industry. Use point valves allow process fluids to be transferred, sampled, drained or diverted with minimal impact on critical systems such as WFI and purified water.

Typical Applications:

- Point-of-use valves
- Piping Branch valves

Specifications

Standard Sizes:

- 0.25" 2" (DN 8 50) Valve size
- 0.5" 4" (DN 15 100) Run size
- Other sizes available upon request

Materials:


- 316L ASTM A479
- DN 177440, 1.4435
- AL6XN
- Hastelloy C-22 & C-276
- Other materials available upon request
 Standard Food Commentioner

Standard End Connections:

- 14, 16, 18, 20 Gauge OD tubing
- DIN/ISO
- Tri-Clover Tri-Clamp®
- Others available upon request

Compatible with standard Pure-Flo topworks: See PFTOP for details on available manual bonnets or actuator.





Flow Path







Pure-Flo®

www.hollandapt.com Phone: 800-800-8464


How to Order a Zero Static Block Body Tee


ZSBBT with a 1" wrought stainless steel main valve with Tri-Clamp end connection and a 2" tube with buttweld ends, 25 Ra interior finish, standard exterior finish (Scotch Brite).

Figure Number: ZSBBT-1-W-419-2-X28-6-1-0

Configuration Example		ZSBBT	1	W	419	2	X28	6-1-0
Valve Body	Block Type	ZSBBT						
	Valve Size		1					
	Body Type			W				
	Body End Connection				419			
	Zerostatic Tube Size					2		
	Zerostatic Tube End Connection						X28	
	Zerostatic Tube Second End Connection							
	Polish Selections							6-1-0

To add topworks, see BBTOP-07. For additional figure numbers, see PFORD.



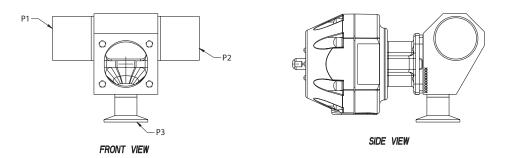

Please contact Pure-Flo CA at 805-520-7200 for the latest drawing and dimensional information. The above drawing should only be used as a general reference.

ITT Pure-Flo